

09/29/00  
jc928 U.S. PTO

09/29/00  
jc928 U.S. PTO

10.02.00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	1662-27100 (P00-2945)
	First Inventor or Application Identifier	Robin T. CASTELL et al.
	Title	A Standardized RF Module Insert For A Portable . . . Device
	Express Mail Label No.	EL705960613US

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	---

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages  ]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention (plus cover sheet)
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets  ]
4. Oath or Declaration [Total Pages  ]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

#### ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: .....

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_ / \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

#### 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label  or ☒ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

Name	Jonathan M. Harris				
	Conley, Rose & Tayon, P.C.				
Address	PO Box 3267				
City	Houston	State	TX	Zip Code	77253-3267
Country	USA	Telephone	713-238-8000	Fax	713-238-8008

Name (Print/Type)	Michael F. Heim	Registration No. (Attorney/Agent)	32,702
Signature	<i>Michael F. Heim</i>	Date	September 29, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

M:\C\1662\27100\PTO TRANS 01

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL**  
**for FY 2000**

Patent fees are subject to annual revision.

Small Entity payments must be supported by a small entity statement,  
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.  
See 37 C.F.R. §§ 1.27 and 1.28.**TOTAL AMOUNT OF PAYMENT** (\$) 916.00**Complete if Known**

Application Number	NOT YET ASSIGNED
Filing Date	CONCURRENTLY HEREWITH
First Named Inventor	Robin T. CASTELL et al.
Examiner Name	UNKNOWN
Group / Art Unit	UNKNOWN
Attorney Docket No.	1662-27100 (P00-2945)

**METHOD OF PAYMENT** (check one)

- 1.
- ☒
- The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to.

Deposit Account Number 03-2630

Deposit Account Name Compaq Computer Corporation

☒ Charge Any Additional Fee Required  
Under 37 CFR §§ 1.16 and 1.17

- 2.
- ☐
- Payment Enclosed:

☐ Check ☐ Money Order ☐ Other**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
101	690	201	345	Utility filing fee	690.00
106	310	206	155	Design filing fee	
107	480	207	240	Plant filing fee	
108	690	208	345	Reissue filing fee	
114	150	214	75	Provisional filing fee	

**SUBTOTAL (1)** (\$) 690.00**2. EXTRA CLAIM FEES**

Total Claims		Extra Claims		Fee from below		Fee Paid	
26	-20**	6	X	18.00	=	108.00	
4	-3**	1	X	78.00	=	78.00	
					=	00.00	

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity		Small Entity		Fee Description
Fee Code	Fee (\$)	Fee Code	Fee (\$)	
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim, if not paid
109	78	209	39	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

**SUBTOTAL (2)** (\$) 186.00**FEE CALCULATION** (continued)**3. ADDITIONAL FEES**

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	380	216	190	Extension for reply within second month	
117	870	217	435	Extension for reply within third month	
118	1,360	218	680	Extension for reply within fourth month	
128	1,850	228	925	Extension for reply within fifth month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of an appeal	
121	260	221	130	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00
146	690	246	345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	690	249	345	For each additional invention to be examined (37 CFR § 1.129(b))	
Other fee (specify) _____					
Other fee (specify) _____					

\*Reduced by Basic Filing Fee Paid


**SUBTOTAL (3)** (\$) 40.00**SUBMITTED BY**

Name (Print/Type) Michael F. Heim

Registration No. 32,702  
(Attorney/Agent)**Complete (if applicable)**

Telephone (713) 238-8000

Signature



Date September 29, 2000

**WARNING:**

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

M:\C\1662\27100\PTO FEE TRANS 01

[illegible]

# A STANDARDIZED RF MODULE INSERT FOR A PORTABLE ELECTRONIC PROCESSING DEVICE

Robin T. Castell  
6703 River Mill Drive  
Spring, Texas 77379  
Citizenship: U.S.A.

William Caldwell Crosswy  
2 South Regent Oak  
The Woodlands, Texas 77381  
Citizenship: U.S.A.

**A STANDARDIZED RF MODULE INSERT FOR A PORTABLE  
ELECTRONIC PROCESSING DEVICE**

5

**CROSS-REFERENCE TO RELATED APPLICATIONS**

Not applicable.

10

**STATEMENT REGARDING FEDERALLY SPONSORED  
RESEARCH OR DEVELOPMENT**

Not applicable.

**BACKGROUND OF THE INVENTION**

15

Field of the Invention

The present invention relates generally to a technique for incorporating an RF transceiver onto the body of an electronic device. More particularly, it relates to a fully integrated, device-independent RF transmit/receive module that combines the antenna and associated electronics into a single package and can be installed and used on a variety of electronic devices for the purpose of communicating with other electronic devices.

20

Background of the Invention

As portable devices become more capable of storing and displaying information, a need inherently arises for data transfers between these devices. One example of this type of transfer includes the downloading of personal schedules and contact information from a computer to a personal digital (or data) assistant (PDA). This communication link is typically established via

25

cumbersome cabling and often proprietary connectors. Wireless communication networks allow this type of data transfer to take place without the need for physical connections.

Generally stated, wireless communication allows for the transmission and reception of data without the need for physical connections. This data can take many forms including audio and video signals or even facsimile and text messages. The progress of wireless telephony and wireless communication between people has been aided by the development of cellular standards such as GSM in Europe and AMPS, CDMA, and TDMA in North America. With the development of standards such as Bluetooth and IEEE 802.11, wireless communication between electronic devices is becoming even more prevalent.

The Bluetooth and IEEE 802.11 wireless communication standards allow for short range radio links between electronic devices. In general, these standards allow for point-to-point or point-to-multipoint wireless communications. The Bluetooth standard is generally used in wireless personal area networks (WPAN) and allows users to transfer information between mobile PCs, mobile phones and other devices. The IEEE 802.11 standard is generally used for wireless local area networks (WLAN) and may be used to communicate between PCs, PDAs, and other computing devices. Both offer the advantage of allowing a user or users to establish communications between two or more electronic devices for a data transfer without the need for cumbersome cabling and connectors. Radios which operate according to these standards may transmit or receive signals in the unlicensed, universal ISM (Industrial, Scientific, and Medical) radio frequency band between 2.4 and 2.4835 GHz.

The IEEE 802.11 standard and the IrDA standards also allow for wireless communication via infrared (IR) transmission in the 300 to 428,000 GHz range. IR communication may offer greater security than RF communication, but also requires a direct "line of sight" link between the

communicating devices and can be adversely affected by environmental influences. RF transmission, on the other hand, allows for communication around corners and through walls or barriers. Security and interference problems associated with RF communications are alleviated with the implementation of direct sequence or frequency hopping spread spectrum techniques.

- 5 Other measures such as error correction and collision avoidance help ensure robust data transfers.

Current wireless point to point communication solutions exist in either a device model-dependent proprietary solution designed into the main body of a product or may take the form of a PCMCIA card for use with notebook computers. PCMCIA (Personal Computer Memory Card International Association) is an international standards body and trade association that was founded to establish standards for Integrated Circuit cards and to promote interchangeability among mobile computers. PCMCIA cards (also referred to as PC Cards) and slots provide a means of adding external peripheral components such as a modem or a Network Interface Card to a notebook computer. Companies such as Motorola and Samsung are currently offering PC Card solutions for Bluetooth WPANs and/or IEEE 802.11 WLANs.

15 Other point to point wireless communication solutions may take the form of Mini PCI cards that are integrated inside a notebook computer. Mini PCI cards are miniature form factor versions of the PCI (Peripheral Component Interconnect) expansion cards used in desktop computers. PCI and Mini PCI cards plug into a high-speed input/output PCI bus used for connecting performance-critical peripherals to the memory, chipset, and processor. For example, video cards, disk storage devices, and high-speed network interfaces generally use a bus of this sort.

Wireless communication devices that take the form of Mini PCI or PC cards are convenient in that they are based on existing computer hardware and bus architecture. Unfortunately, these

solutions also occupy existing expansion slots that could otherwise be used for peripherals such as network cards and video drivers. Furthermore, any solution that places the RF antenna in close proximity to a computer's motherboard and microprocessor is less than ideal. The computer processor and chipset generate noise which results in signal degradation and attenuation.

- 5 Attenuation is also a result of RF signal multipathing that results from placing the RF antenna in a position where signals can be obstructed by the notebook computer screen and other parts of the system such as magnesium cases or EMI-shielded plastic components.

Experiments show that for significant improvements in performance, the RF antenna in a wireless communication device should be placed high up in an unobstructed location. To account for this, other conventional wireless point to point communication solutions employ a whip or blade type antenna that is mounted high on the device itself or located external to the device. In devices where the antenna is mounted directly to the communicating device, the antenna usually extends beyond the envelope of the product in which they are installed and may be prone to damage resulting in expensive replacement costs. Examples of these types of antennas are described in U.S. Pat. Nos. 5,644,320 and 5,903,548.

Furthermore, in some conventional designs the radio circuitry is often located separate from the antenna. In cases like this, the antenna must be connected via a coaxial cable or shielded wire assembly to the main radio circuitry, which adds to the cost and introduces signal loss and degradation. In addition to being unsightly, the cable assembly can be a nuisance and become tangled with other wiring or other equipment or suffer damage if routed through moving components such as notebook lid hinges. Furthermore, as product configurations change and locations of the radio components change, each new radio configuration must be re-qualified for use by the FCC.

Another disadvantage of certain existing designs is that as wireless specifications change, radio circuitry may become obsolete. If the radio circuitry and/or the antenna subsystem is hardwired into the parent device, then significant disassembly, component replacement, and downtime are required to bring the communication device up to date.

5 It is desirable, therefore, to provide a small, low cost, fully integrated radio module that can be assembled as a complete unit that is standardized across product lines. This radio module would preferably be fully contained (*i.e.*, include antenna and all related circuitry) so that no cable or connector losses occur and would be easily installed in a parent device such as a portable computer or a PDA. Furthermore, the configuration of the module would allow for optimal placement with  
10 regards to RF signal reception and transmission.

### BRIEF SUMMARY OF THE INVENTION

The problems noted above are solved in large part by a fully integrated wireless communication device as disclosed herein. In one embodiment, a wireless network adapter  
15 comprises wireless communication circuitry encased in a shell in the form of a detachable molding element of an electronic device. The wireless network adapter also comprises a bus connector to couple the wireless communication circuitry to an expansion bus when the shell is attached to an outer surface of the electronic device. The adapter is a fully integrated module comprising an RF antenna for communication with a wireless network and a radio modem comprising a radio, a  
20 receiver, and modulation circuitry. The RF antenna in the wireless network adapter may take the form of a dedicated unit housed within the shell of the wireless network adapter, or alternatively, may form a part of the outer shell of the adapter. In yet another solution, the RF antenna may form a part of a company logo located on the shell the adapter.

An alternative embodiment may comprise a detachable molding element that encases a recess in a computer system and a circuit card assembly assembled in the recess of the computer system. The circuit card assembly preferably comprises a fully integrated RF radio module comprising an RF antenna for communication with a wireless network and radio circuitry including a radio, a receiver, and modulation circuitry.

The present invention also contemplates a portable computer comprising, at a minimum, a system microprocessor, an expansion bus, a read-writeable memory device, an input/output device, and an expansion port connected to the expansion bus that is configured to accept the detachable wireless network adapter. Another embodiment of the present invention may comprise a portable computer equipped with an external sleeve configured to accept a wireless network adapter insert.

The wireless network adapter, as disclosed herein, may advantageously provide a compact, inexpensive solution for enabling wireless communications between electronic devices. The adapter is standardized for assembly as a complete unit across product lines and the configuration of the adapter allows for optimal placement with regards to RF signal reception and transmission.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

For a detailed description of the preferred embodiments of the invention, reference will now be made to the accompanying drawings in which:

Figure 1 shows an illustrative diagram of a simple wireless personal area network;

Figure 2a shows an isometric view of a preferred embodiment of a fully integrated RF transceiver radio;

Figure 2b is a reverse isometric view showing the SIM-style connector of the preferred embodiment shown in Figure 2a;

Figures 2c and 2d show alternative embodiments of the RF transceiver radio which implement different connector styles;

Figure 3 shows a schematic of a preferred embodiment of a fully integrated RF transceiver radio;

5 Figure 4 shows an isometric view of the preferred embodiment of an RF transceiver radio installed in a notebook computer;

Figure 5a shows a preferred embodiment of the installation of an RF transceiver radio in a notebook computer;

10 Figure 5b shows a preferred embodiment of the installation of a passive insert in place of an RF transceiver radio in a notebook computer;

Figure 6a shows an alternate embodiment of the receptacle for the RF transceiver module;

Figure 6b shows an alternate embodiment of the installed RF transceiver module when installed;

Figure 6c shows a side view of the alternate RF transceiver module embodiment;

15 Figure 7 shows a third receptacle embodiment for an RF transceiver module;

Figure 8 shows an isometric view of fourth embodiment of an RF transceiver radio installation socket;

Figure 9 shows a receptacle that secures the transceiver module with latches;

20 Figure 10 shows a variety of molding element shapes that may be used to house the RF transceiver in an aesthetic fashion;

Figure 11 shows an alternative embodiment of a fully integrated RF transceiver radio in the form of a circuit card assembly;

Figure 12 shows the installation of the alternative embodiment of Figure 11 installed in a portable computer; and

Figure 13 shows a detachable molding element used to cover the alternative embodiment installed in a portable computer.

5

## NOTATION AND NOMENCLATURE

10 Certain terms are used throughout the following description and claims to refer to particular system components. As one skilled in the art will appreciate, computer companies may refer to a component by different names. This document does not intend to distinguish between components that differ in name but not function. In the following discussion and in the claims, the terms “including” and “comprising” are used in an open-ended fashion, and thus should be interpreted to mean “including, but not limited to...”. Also, the term “couple” or “couples” is intended to mean either an indirect or direct electrical connection. Thus, if a first device couples to a second device, that connection may be through a direct electrical connection, or through an indirect electrical connection via other devices and connections. Additionally, the figures described above depict embodiments of the present invention as they might exist for a laptop computer configuration. This document and the claims herein do not intend to limit the scope of the invention to include only laptop computers, but rather the present invention may appropriately be applied to any of a variety of electronic devices including, but not limited to, notebook or palmtop computers, cellular or wireless telephones, printers, PDAs, calculators, desktop computers, facsimile machines, keyboards, joysticks, headsets, scanners, and other electronic devices.

15  
20

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows an example of a wireless computer network representing a preferred embodiment of the invention, in which a portable computer 100, a cellular phone 110 and a desktop computer 120 may communicate and/or transfer data to one another via wireless communication links. The communication network may be a Bluetooth personal area network, a "HomeRF" network, a wireless local area network per IEEE 802.11 or any other suitable wireless network. It should be appreciated that a variety of devices may reside and communicate in the network in addition to the devices shown in Figure 1. These other devices may include facsimile machines, keyboards, joysticks, headsets and any other electronic device whose operation may benefit from a wireless network.

In order to communicate with other devices, each unit must incorporate an RF (and/or an IR) transceiver that is capable of transmitting and receiving signals per the appropriate communication standard. Naturally, each device in the network must be fitted with compatible radios in order to communicate with the other network devices.

A preferred embodiment of a fully integrated wireless link adapter 200 is shown in Figure 2a. The embodiment shown in Figure 2a integrates a housing for the wireless transceiver 220 and a housing for the wireless transducer 210 into one package. An LED (light emitting diode) 270 may be provided to indicate to the user when the wireless adapter 200 is operating. A company logo 260 may be incorporated for aesthetic reasons, or may be incorporated to implement a functional transducer as described below. The inclusion of the logo may advantageously allow the wireless link adapter 200 to double as a marketing or brand-identifying insert to establish the identity of the manufacturer or owner of the electronic device to which it is attached.

In the following description, it will be assumed that adapter 200 operates to establish an RF radio communications link. However it is noted that adapter 200 may alternatively operate to establish an IR communications link or some other form of wireless communications (e.g., ultrasonic).

5 A schematic representation of adapter 200 is shown in Figure 3. The wireless transceiver module 220 includes wireless communication circuitry 300, radio modem 310, and an input/output connector 320. Wireless communication circuitry 300 typically includes a transmit path and a receive path. The transmit path may include filters, an intermediate frequency (IF) conversion stage, signal modulators, transmit amplifiers, impedance matching circuits to couple the transmit  
10 signal to the antenna, and other suitable circuitry to convert the baseband information signal into a modulated wireless signal. The receive path may include filters, receive amplifiers, downmixing circuitry, demodulators, adaptive gain control and other suitable circuitry to translate the receive wireless signal into a baseband receive signal.. The modulation circuitry in the transmit path may include a channel encoder, an digital-to-analog converter, and mixer stage. The demodulation  
15 circuitry in the receive path may include an analog-to-digital converter, an equalizer, and a decoder.

Radio modem 310 includes bus interface circuitry, link protocol control circuitry, and baseband controller circuitry suitable for converting between a digital data stream and a baseband information signal. The link protocol circuitry and bus interface circuitry take digital data received  
20 from the connector 320 and provide it to the baseband controller for conversion to a raw baseband signal. The baseband controller also converts the received baseband signals from the wireless communication circuitry 300 into digital data that the link control circuitry and bus interface circuitry provide to the connector 320.

Input/output connector 320 allows for communication with the parent device (e.g., laptop, PDA) via a bus such as a universal serial bus (USB). A preferred embodiment of the input/output connector 320 is shown in Figure 2b, which shows a reverse angle isometric view of the adapter 200 shown in Figure 2a. In this particular embodiment, the connector 230 is a SIM (Subscriber Identity Module) style connector typically found in SIM cards used with mobile phones or smart card configurations. The input/output connector may alternatively take the form of electrical contacts 240 as shown in Figure 2c or it may take the form of a pin/socket connector 250 as shown in Figure 2d. The connector 250 may be a USB connector or may be of any other type suitable for circuit card assemblies. Other connector solutions are certainly possible and will be recognized by those skilled in the art. Note that these figures are schematic in nature; no specific pin count or definition should be inferred from these figures.

Referring again to Figure 3, wireless transducer housing 210 includes the RF antenna 340 which transmits and receives signals to and from the applicable RF network. The antenna 340 may take the form of a microstrip, a ceramic design, a planar inverted F antenna (PIFA), or any of a number of low-profile, wireless RF antennas. It may be desirable to introduce a groundplane in the form of a circuit board to which the wireless circuitry is attached, a high-impedance electromagnetic lattice structure, or possibly even the exterior casing of the parent device. Examples of antenna materials and designs are described in K. Virga et al., Low-Profile Enhanced-Bandwidth PIFA Antennas for Wireless Communications Packaging, IEEE Transactions on Microwave Theory and Techniques, Vol. 45, No. 10, October 1997, at 1879 and D. Sievenpiper et al., High-Impedance Electromagnetic Surfaces with a Forbidden Frequency Band, IEEE Transactions on Microwave Theory and Techniques, Vol. 47, No. 11, November 1999, at 2059, which are hereby incorporated by reference.

A variety of antenna technologies may be implemented in the preferred embodiment. In addition to the antennas that may receive and transmit signals in accordance with the Bluetooth and IEEE 802.11 standards discussed above, the preferred embodiment may also be implemented with a dual-mode or multi-mode antenna that conforms to other RF standards. For example, the RF antenna 340 may transmit and receive per any of the standard cellular telephone standards or the General Packet Radio Service (GPRS) as used with the GSM digital cellular standard. GPRS refers to a packet transmission technology that will allow end users to remain constantly connected to a cellular network and receive and transmit data at speeds to over 100 Kbps. The RF antenna 340 may also be configured to transmit and receive per the 3G cellular standard, which is the next generation of mobile communication systems currently under development by the global 3G Partnership Project (3GPP). The 3G standard is based roughly on the GSM cellular standard but is expected to be extended and enhanced for high speed multimedia data services.

Additionally, the RF antenna 340 may alternatively incorporate diversity antenna technology. Antenna diversity generally involves the use of multiple antenna elements whose signals are sampled on a per packet basis so as to select the stronger signal. Multiple antenna elements may also be implemented to provide antenna redundancy or alternatively, the transmit and receive antenna elements may be separated to account for a noisy antenna design.

The components in the preferred embodiment of the invention may be encapsulated in or implemented on a variety of materials. The preferred composition is FR-4 printed circuit board material. Other circuit board materials such as polyimides, glass epoxy, and teflon are certainly feasible. Additionally, other plastics such as PVC and materials used in credit card and smart card manufacturing are also possible.

Another embodiment of the wireless link adapter 200 may incorporate the antenna into the exterior surface of the adapter or into the exterior casing of the parent device, thereby eliminating the need for a dedicated antenna and transducer housing 210. Thermoplastics impregnated with conductive material may be molded onto the exterior of the adapter 200. Alternatively, the conductive material which functions as the RF antenna may be electro-deposited or vapor deposited on the exterior surface of the adapter 200. In another embodiment, the antenna material may be deposited, molded, or otherwise applied in the shape of a company logo 260. The overall thickness of the adapter 200 is expected to be on the order of about 2 mm and the size to be roughly that of a credit card or smaller. The external configuration of the adapter 200 allows for easy standardization across product lines and device types. Furthermore, the adapter 200 can be installed during manufacture, at the point of sale, or by the customer as an upgrade option. In either case, the fully integrated wireless link adapter 200 is ready for use and is installed without the need for antenna assembly, alignment, or tuning.

Figure 4 shows a preferred embodiment of the wireless link adapter 200 installed in a portable computer 400. In a preferred embodiment, the transducer 210 is positioned near the upper edge 410 of the display area of the portable computer 400.

Installation of the preferred embodiment of the wireless link adapter 200 into a parent device such as a portable computer 400 is shown in Figure 5a. During installation, the adapter 200 slides into a recess 510 in the computer 400. Once the radio is pushed or slid into place, the connector contacts 520 on the computer 400 will make contact with the connector contacts located on the adapter 200. The radio may be secured in place with screws 530 as shown. Alternative securing methods such as latches, detents, and quick-release mechanisms may also be used. One such alternative embodiment is shown in Figure 9.

Referring now to Figure 5b, in the event a user does not want or need the wireless link adapter 200 installed in the computer 400, a passive insert 540 may be installed to cover the recess 510 and protect the connector contacts 520. The passive insert may be identical in shape to the wireless link adapter 200 or may be slightly different in shape to accommodate manufacturing requirements and reduce cost.

Since the wireless link adapter 200 connects to the computer 400 via an expansion bus, the recess 510 in the portable computer 400 may alternatively be used for other expansion devices such as a camera or a biometric security device. Other devices are certainly applicable and will be recognized by those skilled in the art.

Figure 6a represents another embodiment of the installation of a protective cover 600 onto a computer 605 that is not equipped with a wireless link adapter. In this embodiment, the cover 600 is snapped or pressed into a recess 610 in the case of the computer 605. Once installed, the protective cover 600 will conceal the expansion bus connector 620. The cover may also contain a company logo or other descriptive or decorative markings. Any exposed mounting holes may be covered or filled using screws or rubber or plastic plugs 630.

Figure 6b represents an alternative embodiment where a wireless link adapter 640 is installed in computer 605 and is partially secured using screws 650. The full means by which this embodiment of the adapter 640 is installed and secured may be more clearly understood by referring to Figure 6c.

Figure 6c shows a side view of the wireless link adapter 640. The wireless network circuitry is mounted in a recess 660 on the underside of the adapter 640. Also mounted within this recess 660 is the input/output connector 670. During installation, connector 670 is attached to connector 620 (Figure 6a) to connect the adapter 640 to the expansion bus in computer 605. The

adapter 640 is then installed into the recess 610 such that hold down clip 680 engages the edge 690 of the connector opening in the computer case. Screws 650 are then inserted through the adapter 640 and into the computer 605 to complete the installation.

Figure 7 represents an alternative embodiment of the expansion port in a portable computer 700 into which a wireless link adapter may be installed. In this particular embodiment, a series of fingers or ledges 710 are molded into the upper display area of the computer 700. The ledges 710 are separated by gaps or spaces 720. The mating insert (whether it be a passive insert or wireless link adapter) will have its own set of fingers or protrusions that fit within these gaps 720. During installation of the adapter, the protrusions on the adapter are aligned with the gaps 720 in the computer case and the adapter is inserted in the direction of arrow 740. Once the adapter protrusions are below the ledges 710, the adapter is then slid in the direction of arrow 750. The adapter (or passive insert) may then be secured using screws inserted into the threaded holes 730 or some other suitable securing method. This embodiment may offer the advantage of providing a more secure retaining mechanism and also limits the distance that the adapter needs to be slid into and out of the expansion port.

Figure 8 represents an alternative embodiment of the installation of a wireless link adapter 800 into a portable computer 810. In this particular embodiment, the adapter 800 is placed into a sleeve 820 which is permanently attached to the exterior of the computer 810. This embodiment allows an adapter 800 to be incorporated into existing notebook designs with minimal tooling changes.

Figure 9 shows an alternative means of securing the wireless link adapter 200 to a portable computer 400. In this particular embodiment, latches 900 that hold the adapter 200 in place are incorporated into the case of the computer 400. It can be appreciated that this embodiment offers

advantages over the use of screws or fasteners since the securing device is attached to the computer 400 and there is no hardware to be lost during installation or removal of the adapter 200. As mentioned previously, other means of securing the adapter 200 to the computer 400 are possible and the descriptions herein are not intended to limit the scope of the securing mechanism. For example, special hardware may be used to secure the adapter 200 to the computer 400. Such hardware may require proprietary or specialized tools for installation and removal of the adapter 200. Tamper resistant hardware of this type may advantageously deter thieves and provide a measure of security for the adapter 200 and computer 400.

It is noted that wireless link adapter 200 may be advantageously packaged as a removable piece of decorative molding or trim. Packaged in this manner, the adapter adds to the aesthetic appeal of the electronic device while permitting easy removal and installation of the adapter. The molding element may take various forms such as those shown in Figure 10.

An alternative embodiment may preferably take the form of a conventional circuit card assembly 1150 as shown in Figure 11. In this embodiment, the RF Radio circuitry and components shown in Figure 3 are installed on a circuit board 1130. Included in this embodiment are an RF Radio Module 1100, the RF Antenna 1110, connector contacts 1120, and any other necessary circuitry as discussed above in the description of the RF Radio Adapter of Figure 3.

This alternative embodiment may preferably be installed in a portable computer 1200 as shown in Figure 12. Portable computer 1200 preferably has a recess 1210 in the exterior shell behind the display area of the computer in which the circuit card assembly 1150 is installed. The recess 1210 may be placed in the location shown in Figure 12 or it may be placed in alternative locations as dictated by the size and shape of the circuit card assembly 1150. This recess should preferably be located such that the RF Antenna 1110 is located high on the display cover as

discussed above. The recess 1210 in the portable computer preferably has mating contacts which connect to connector contacts 1120 thereby permitting transmission of signals between the RF Radio and the portable computer.

This alternative embodiment of the RF Radio may preferably be enclosed in a detachable molding element 1300 as shown in Figure 13. This molding element 1300 preferably attaches to the exterior shell of the portable computer 1200. Additionally, the molding element 1300 preferably covers the circuit card assembly 1150 and the recess 1210 in the exterior shell of the portable computer 1200. This embodiment offers the advantage of using the same molding element 1300 to cover the recess 1210 regardless of whether the end user opts to purchase the optional RF Radio assembly.

The above discussion is meant to be illustrative of the principles and various embodiments of the present invention. Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. For example, it is possible for the wireless link adapter to be fully incorporated into the latch mechanism of a portable computer. It is intended that the following claims be interpreted to embrace all such variations and modifications.

## CLAIMS

What is claimed is:

- 1 1. A wireless network adapter, comprising:  
2 wireless communication circuitry encased in a shell;  
3 wherein the shell is a detachable molding element of an electronic device.
- 1 2. The wireless network adapter of claim 1 wherein the wireless communication circuitry  
2 comprises:  
3 a modulator configured to produce a transmit signal suitable for conveying data on a  
4 wireless link; and  
5 a demodulator configured to produce a baseband signal that conveys information received  
6 via a wireless link.
- 1 3. The wireless network adapter of claim 1 further comprising:  
2 a bus connector adapted to couple the wireless communication circuitry to an expansion  
3 bus when the shell is attached to an outer surface of an electronic device having said expansion bus
- 1 4. The wireless network adapter of claim 3 further comprising:  
2 an RF antenna for communication with a wireless network; and  
3 a radio modem comprising a bus interface, a baseband controller, and a radio transceiver  
4 that combine to modulate data onto a radio frequency carrier signal.
- 1 5. The wireless network adapter of claim 4 wherein:

2 the RF antenna is a dedicated unit housed within the shell of the wireless network adapter.

1 6. The wireless network adapter of claim 4 wherein:

2 the RF antenna forms a part of the shell of the wireless network adapter.

1 7. The wireless network adapter of claim 4 wherein:

2 the RF antenna forms a part of a company logo or identifying mark located on the shell of  
3 the wireless network adapter.

1 8. The wireless network adapter of claim 4 wherein:

2 the RF antenna is a multi-mode antenna configured to transmit and receive signals  
3 conforming to multiple RF standards.

1 9. The wireless network adapter of claim 4 wherein:

2 the RF antenna incorporates diversity antenna technology.

1 10. A computer system, comprising:

2 a system microprocessor;

3 an expansion bus coupled to the microprocessor and configured to transport data to and  
4 from at least one input/output device;

5 an input/output device operatively coupled to said microprocessor; and

6 an expansion port connected to the expansion bus, wherein the port is configured to accept  
7 a detachable molding element.

1 11. The computer system of claim 10 wherein:

2 the detachable molding element houses a wireless network adapter comprising:

3 wireless communication circuitry;

4 a bus connector adapted to couple the wireless communication circuitry to the expansion  
5 bus when the molding element is attached to the expansion port of the computer system;

6 an RF antenna for communication with a wireless network; and

7 a radio modem comprising a circuitry for conversion between digital and modulated analog  
8 signals.

1 12. The computer system of claim 10 wherein:

2 the expansion port comprises a recess configured to accept a circuit card assembly  
3 comprising:

4 wireless communication circuitry;

5 a bus connector adapted to couple the wireless communication circuitry to the expansion  
6 bus when the circuit card assembly is attached to the expansion port of the computer system;

7 an RF antenna for communication with a wireless network;

8 a radio modem comprising a circuitry for conversion between digital and modulated analog  
9 signals; and

10 wherein when the detachable molding element is installed, the molding element encases the  
11 circuit card assembly and covers the recess in the computer system.

1 13. The computer system of claim 10 wherein:

2 the detachable molding element houses an expansion device.

1 14. The computer system of claim 13, wherein the expansion device is a camera.

1 15. The computer system of claim 13, wherein the expansion device is a biometric security  
2 device.

1 16. The computer system of claim 11 wherein:  
2 the RF antenna of the wireless network adapter forms a part of a company logo located on  
3 the shell of the molding element.

1 17. The computer system of claim 11 wherein:  
2 the exterior case of the computer system functions as the RF antenna of the wireless  
3 network adapter.

1 18. A computer system, comprising:  
2 a system microprocessor;  
3 an expansion bus coupled to the microprocessor;  
4 an input/output device operatively coupled to said microprocessor; and  
5 an expansion port connected to the expansion bus configured to accept a wireless network  
6 adapter;  
7 wherein the expansion port is attached to the exterior case of the computer system.

1 19. The computer system of claim 18 wherein:

2 the wireless network adapter comprises:

3 wireless communication circuitry;

4 a bus connector adapted to couple the wireless communication circuitry to the expansion  
5 bus when the molding element is attached to the expansion port of the computer system;

6 an RF antenna for communication with a wireless network; and

7 a radio modem comprising a circuitry for conversion between digital and modulated analog  
8 signals.

1 20. The computer system of claim 19 wherein:

2 the RF antenna of the wireless network adapter forms a part of a company logo located on  
3 the exterior surface of the wireless network adapter.

1 21. The computer system of claim 19 wherein:

2 the RF antenna of the wireless network adapter forms a part of a company logo located on  
3 the expansion port of the computer system.

1 22. The computer system of claim 19 wherein:

2 the exterior case of the computer system functions as the RF antenna of the wireless  
3 network adapter.

1 23. A laptop computer which comprises:

2 a clamshell case having a shroud and a lid, wherein the shroud has a keyboard which is  
3 protected by the lid when the lid is in a closed position, wherein the lid has a  
4 display which is protected by the lid when the lid is in the closed position; and  
5 an expansion port, wherein the expansion port is located proximate to an upper edge of the  
6 lid when the lid is in the open position.

1 24. The computer of claim 23, further comprising:

2 a multifunctional module coupled to the expansion port, wherein one of the functions of the  
3 multifunctional module is as a wireless link adapter.

1 25. The computer of claim 24, wherein a second of the functions of the multifunctional module  
2 is decorative embellishment of the lid.

1 26. The computer of claim 24, wherein a second of the functions of the multifunctional module  
2 is as a latch release for the lid.

## ABSTRACT

A wireless network adapter for establishing wireless communication links between electronic devices. In one embodiment, the wireless network adapter comprises wireless communication circuitry encased in a shell in the form of a detachable molding element of an electronic device. The wireless network adapter further comprises a bus connector adapted to couple the wireless communication circuitry to an expansion bus when the shell is attached to an outer surface of an electronic device. The wireless network adapter is a fully integrated solution further comprising an RF antenna for communication with a wireless network and a radio modem comprising a radio, a receiver, and modulation circuitry. The RF antenna in the wireless network adapter may take one of several forms. The antenna may be a dedicated unit housed within the shell of the wireless network adapter. Alternatively, the antenna may form a part of the outer shell of the adapter or it may form a part of a company logo located on the shell the adapter. The wireless network adapter is installed in an electronic device such as a portable computer. The electronic device comprises, at a minimum, a system microprocessor, an expansion bus, a read-writeable memory device, an input/output device, and an expansion port connected to the expansion bus that is configured to accept the detachable wireless network adapter. Another embodiment of the present invention comprises an electronic device equipped with an external sleeve configured to accept a wireless network adapter insert.

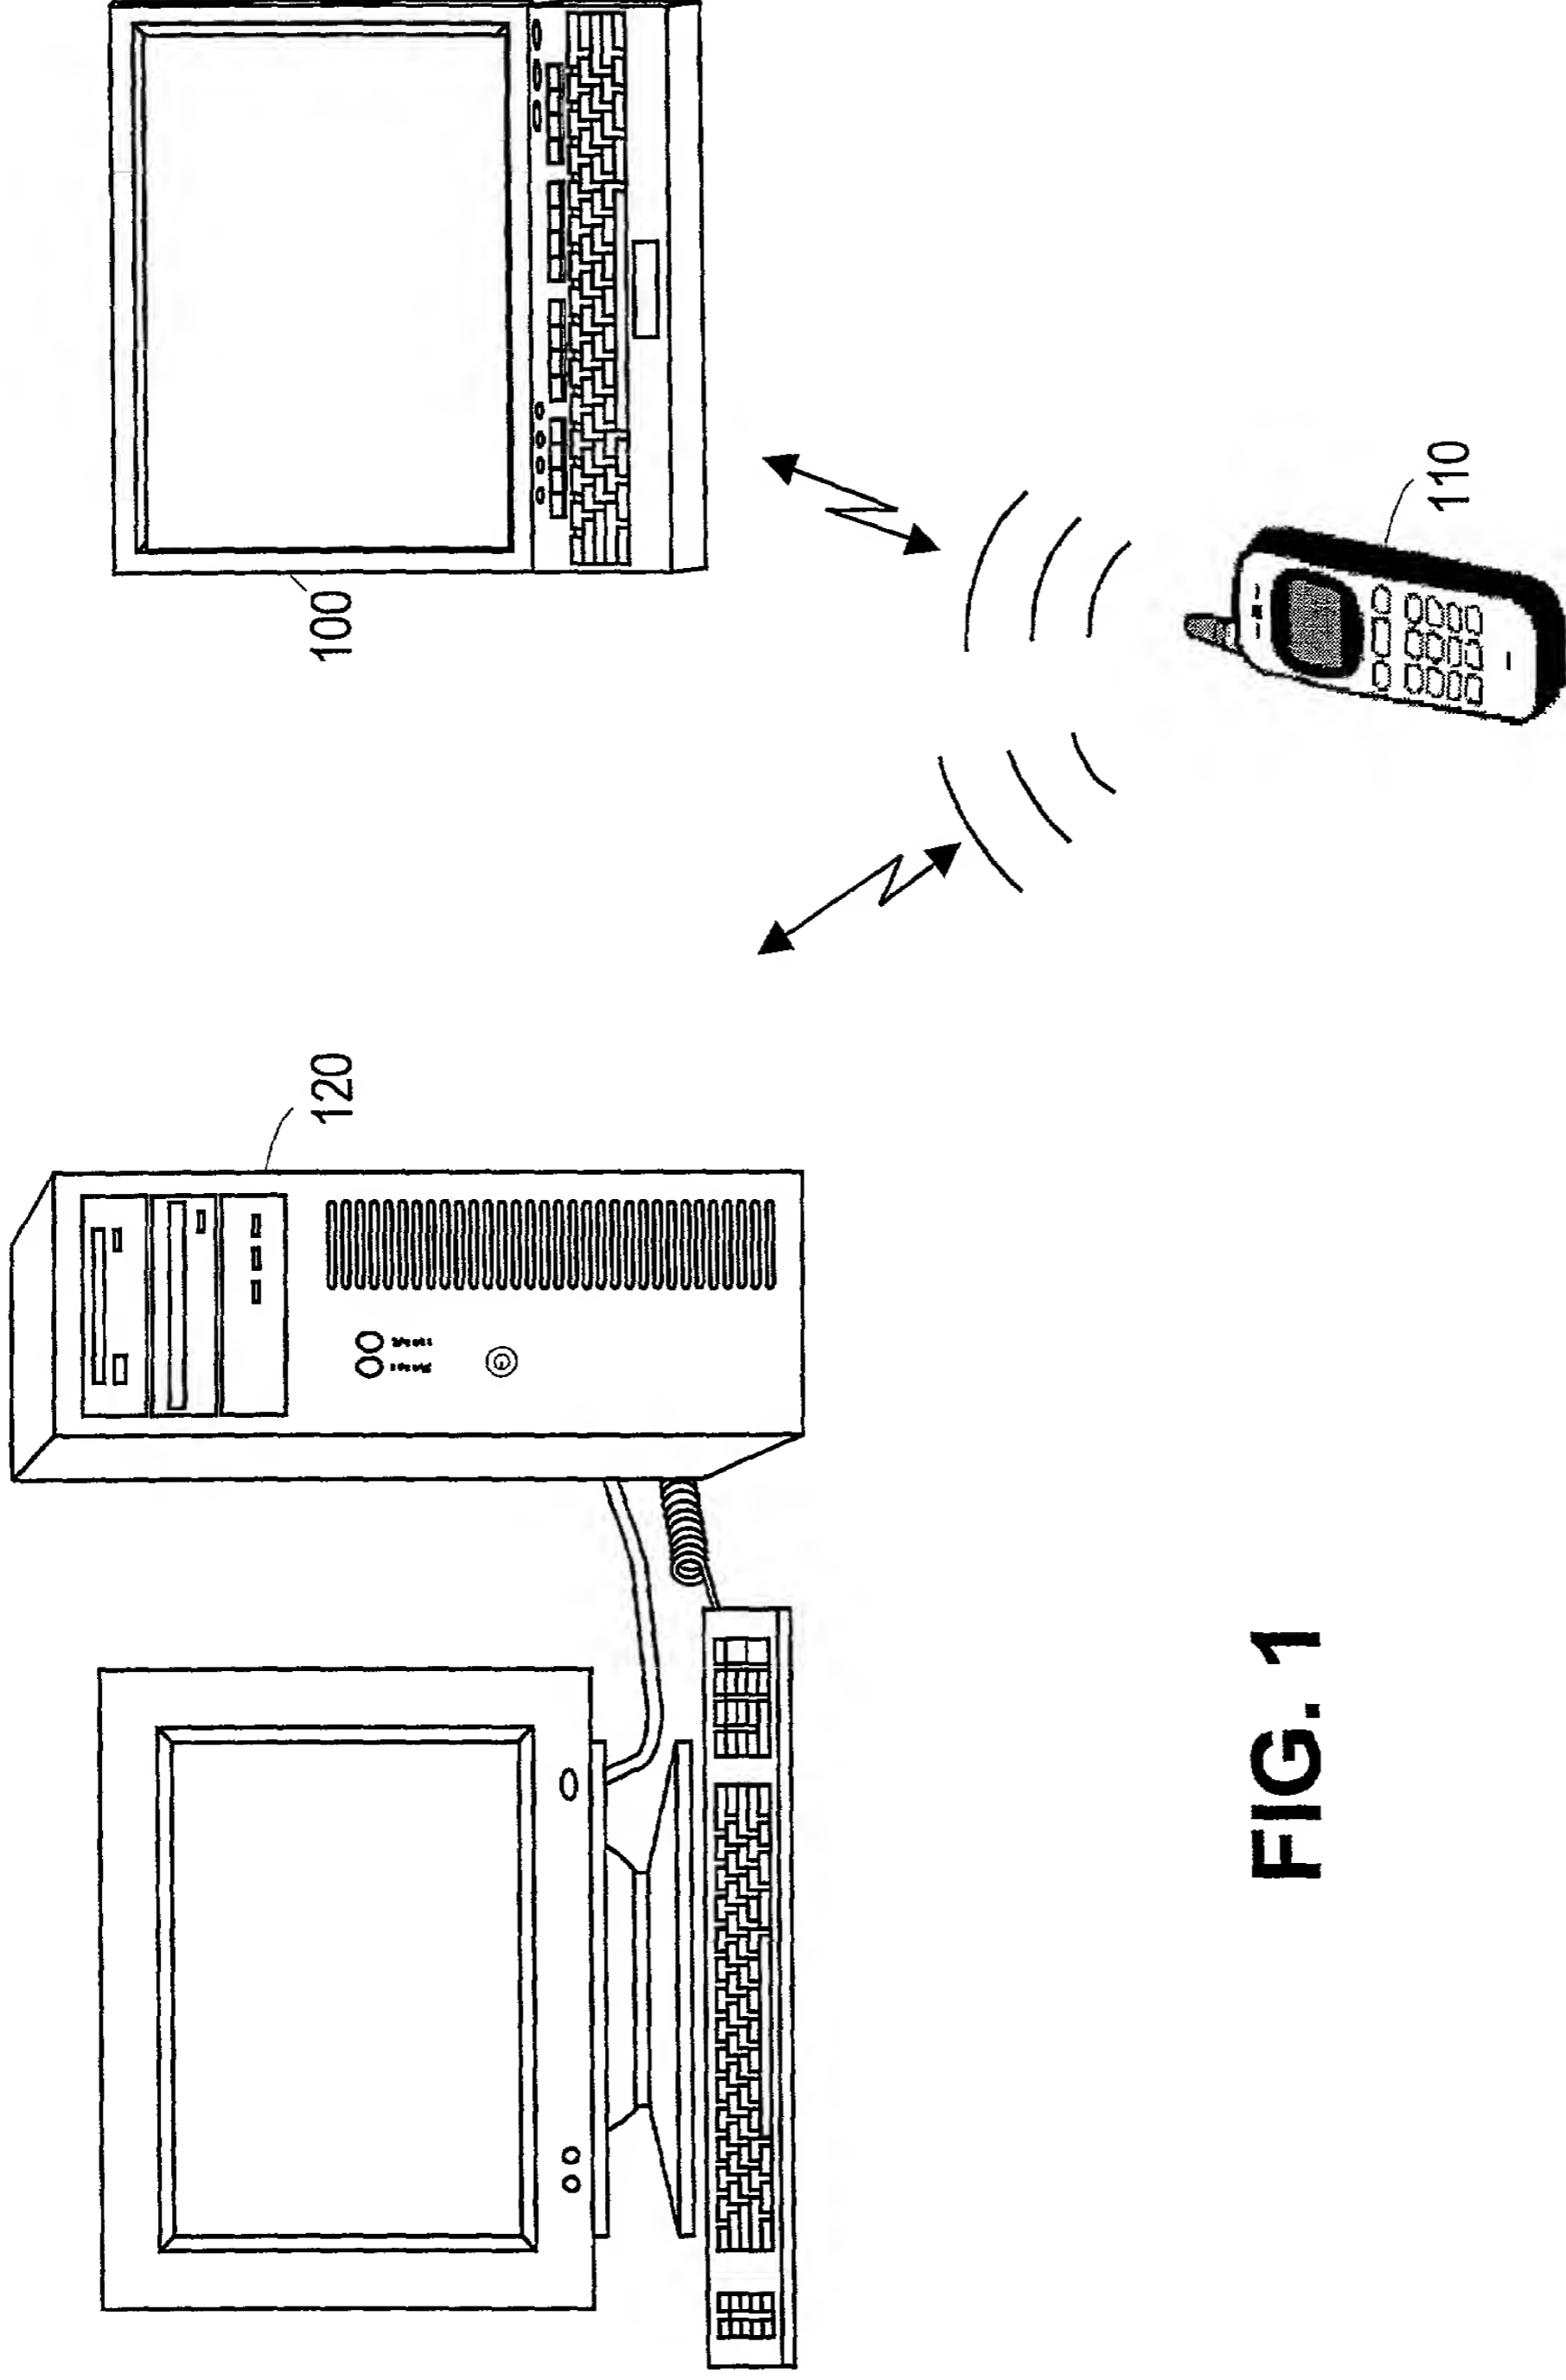


FIG. 1

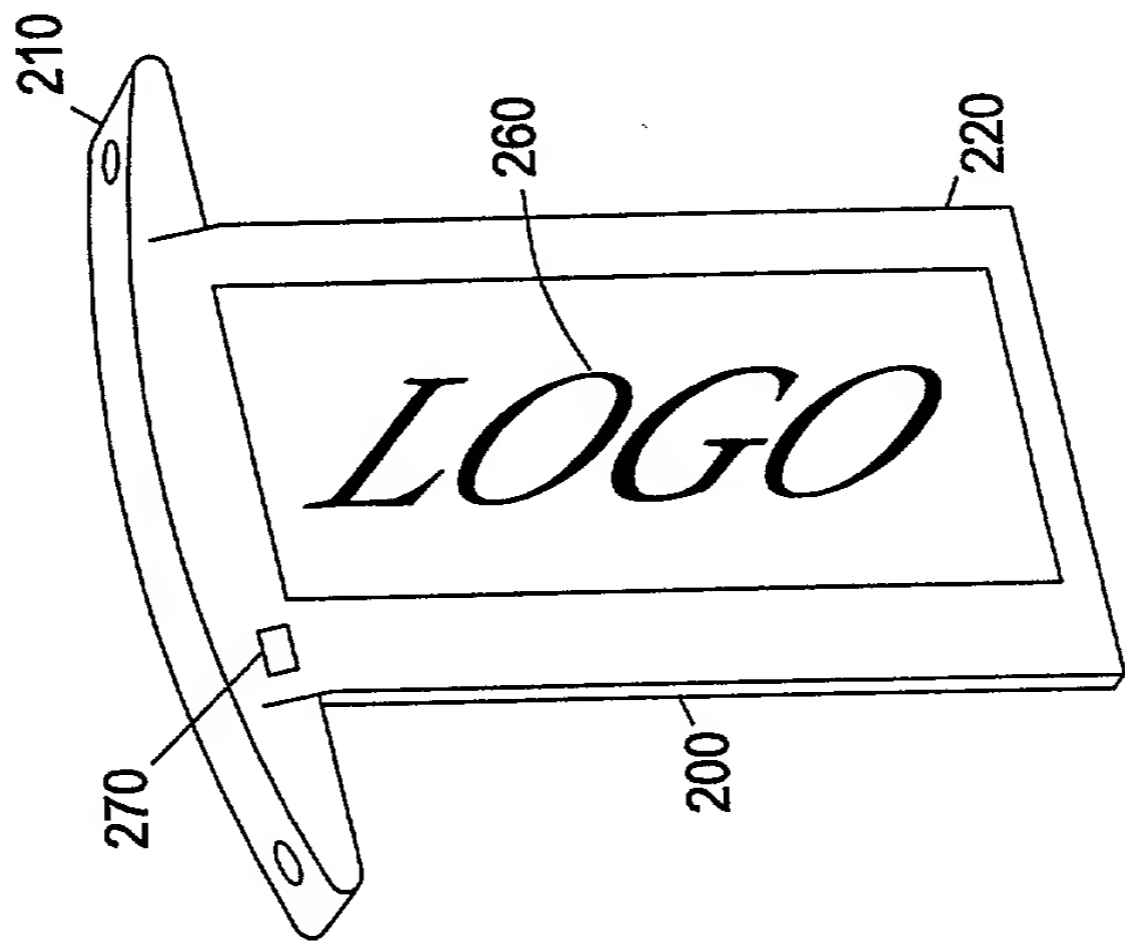


Fig. 2a

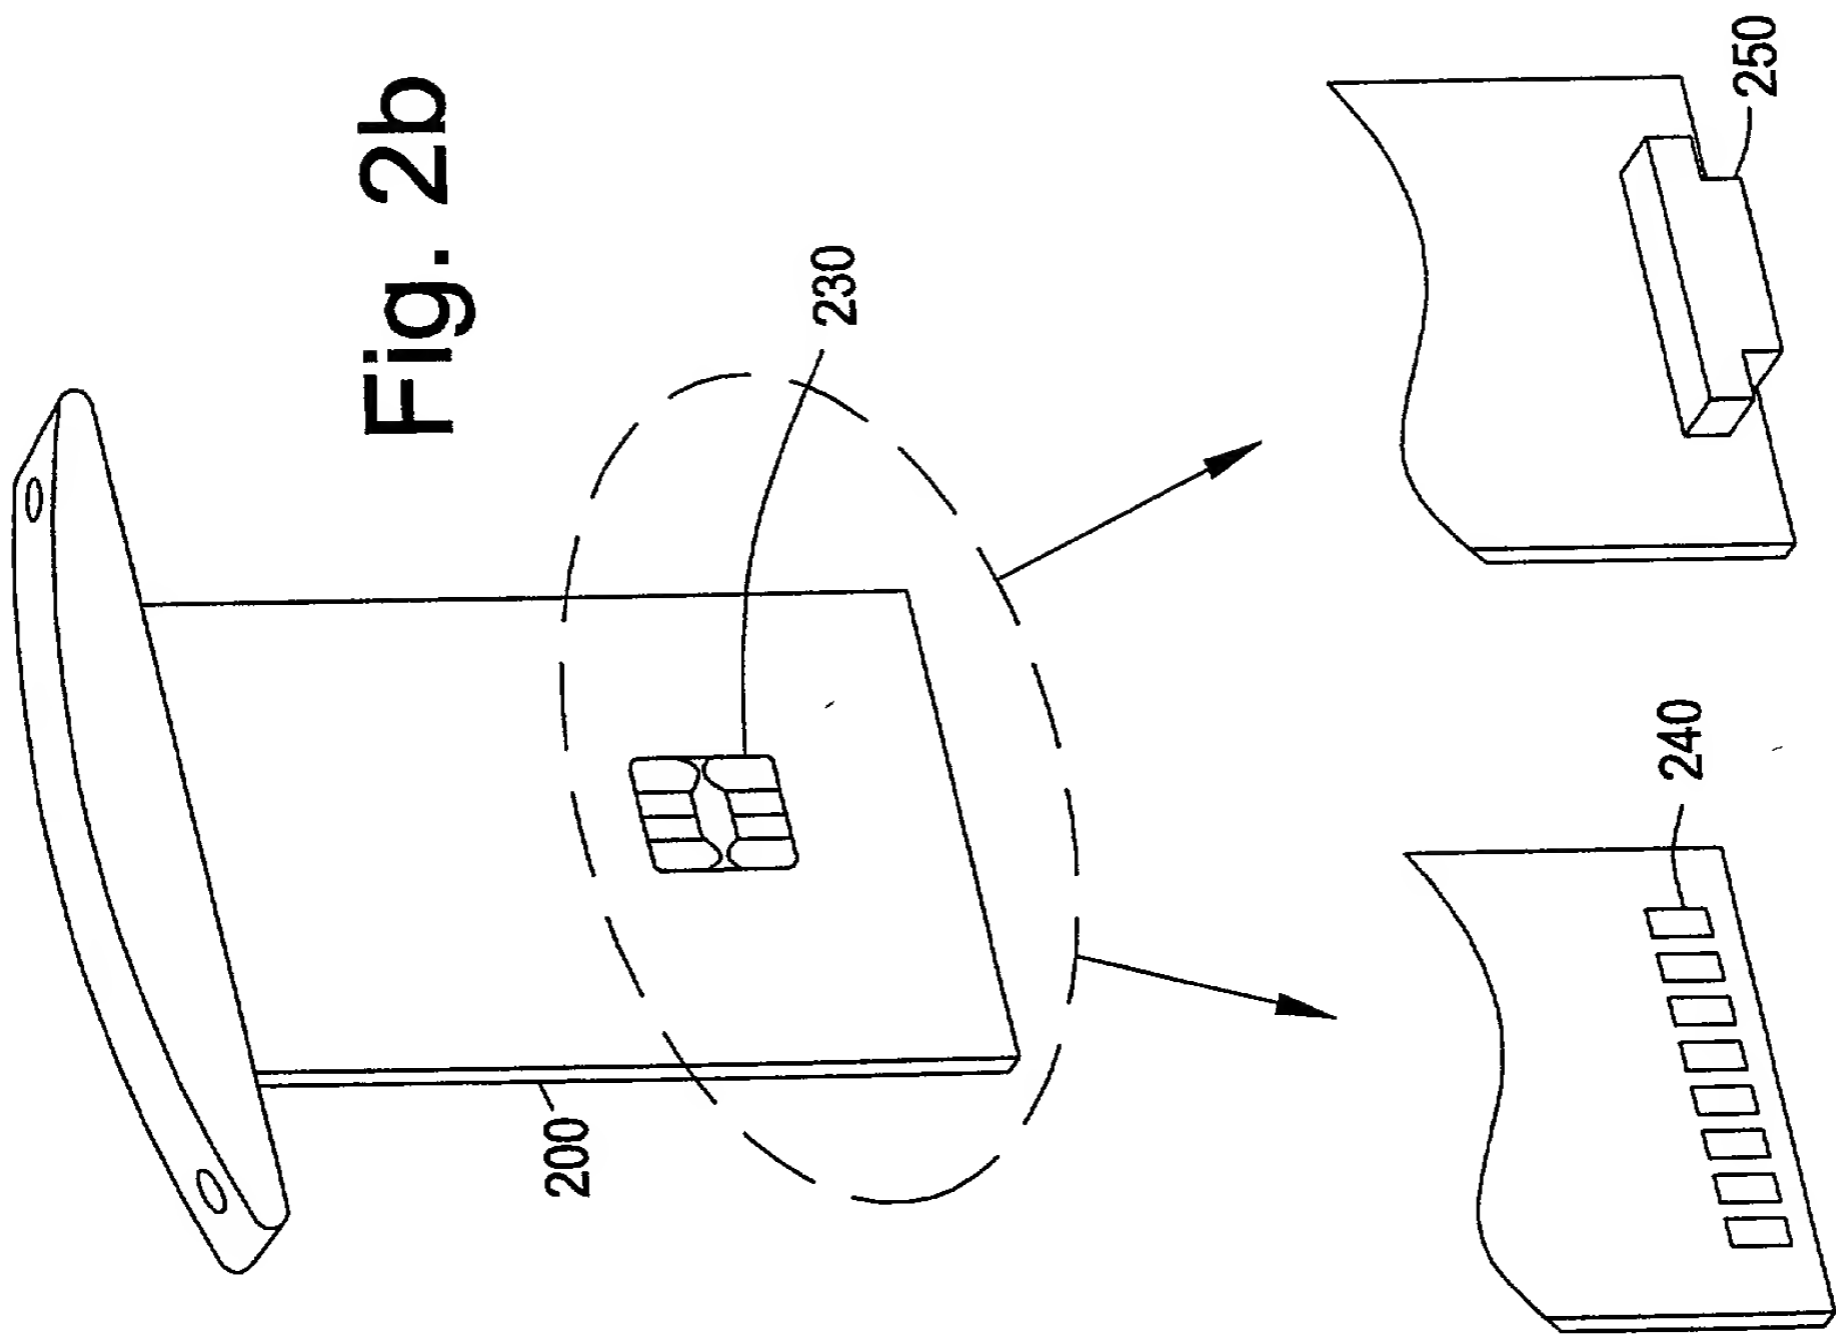


Fig. 2b

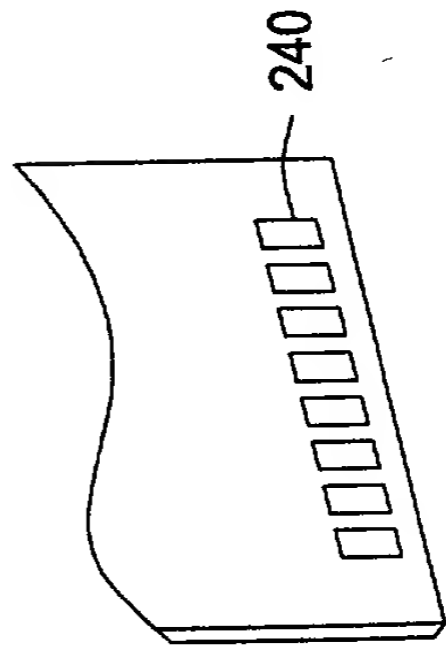


Fig. 2c

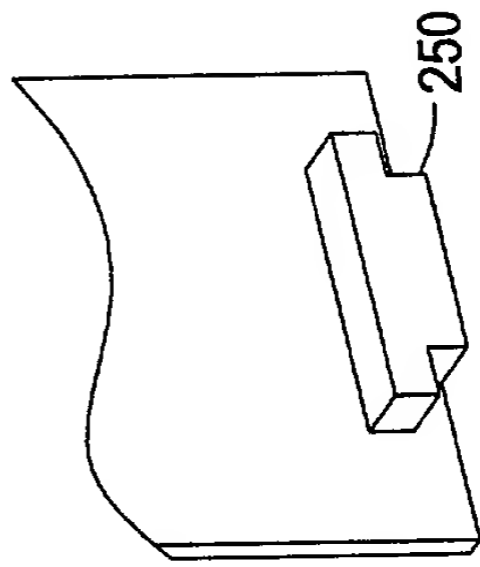
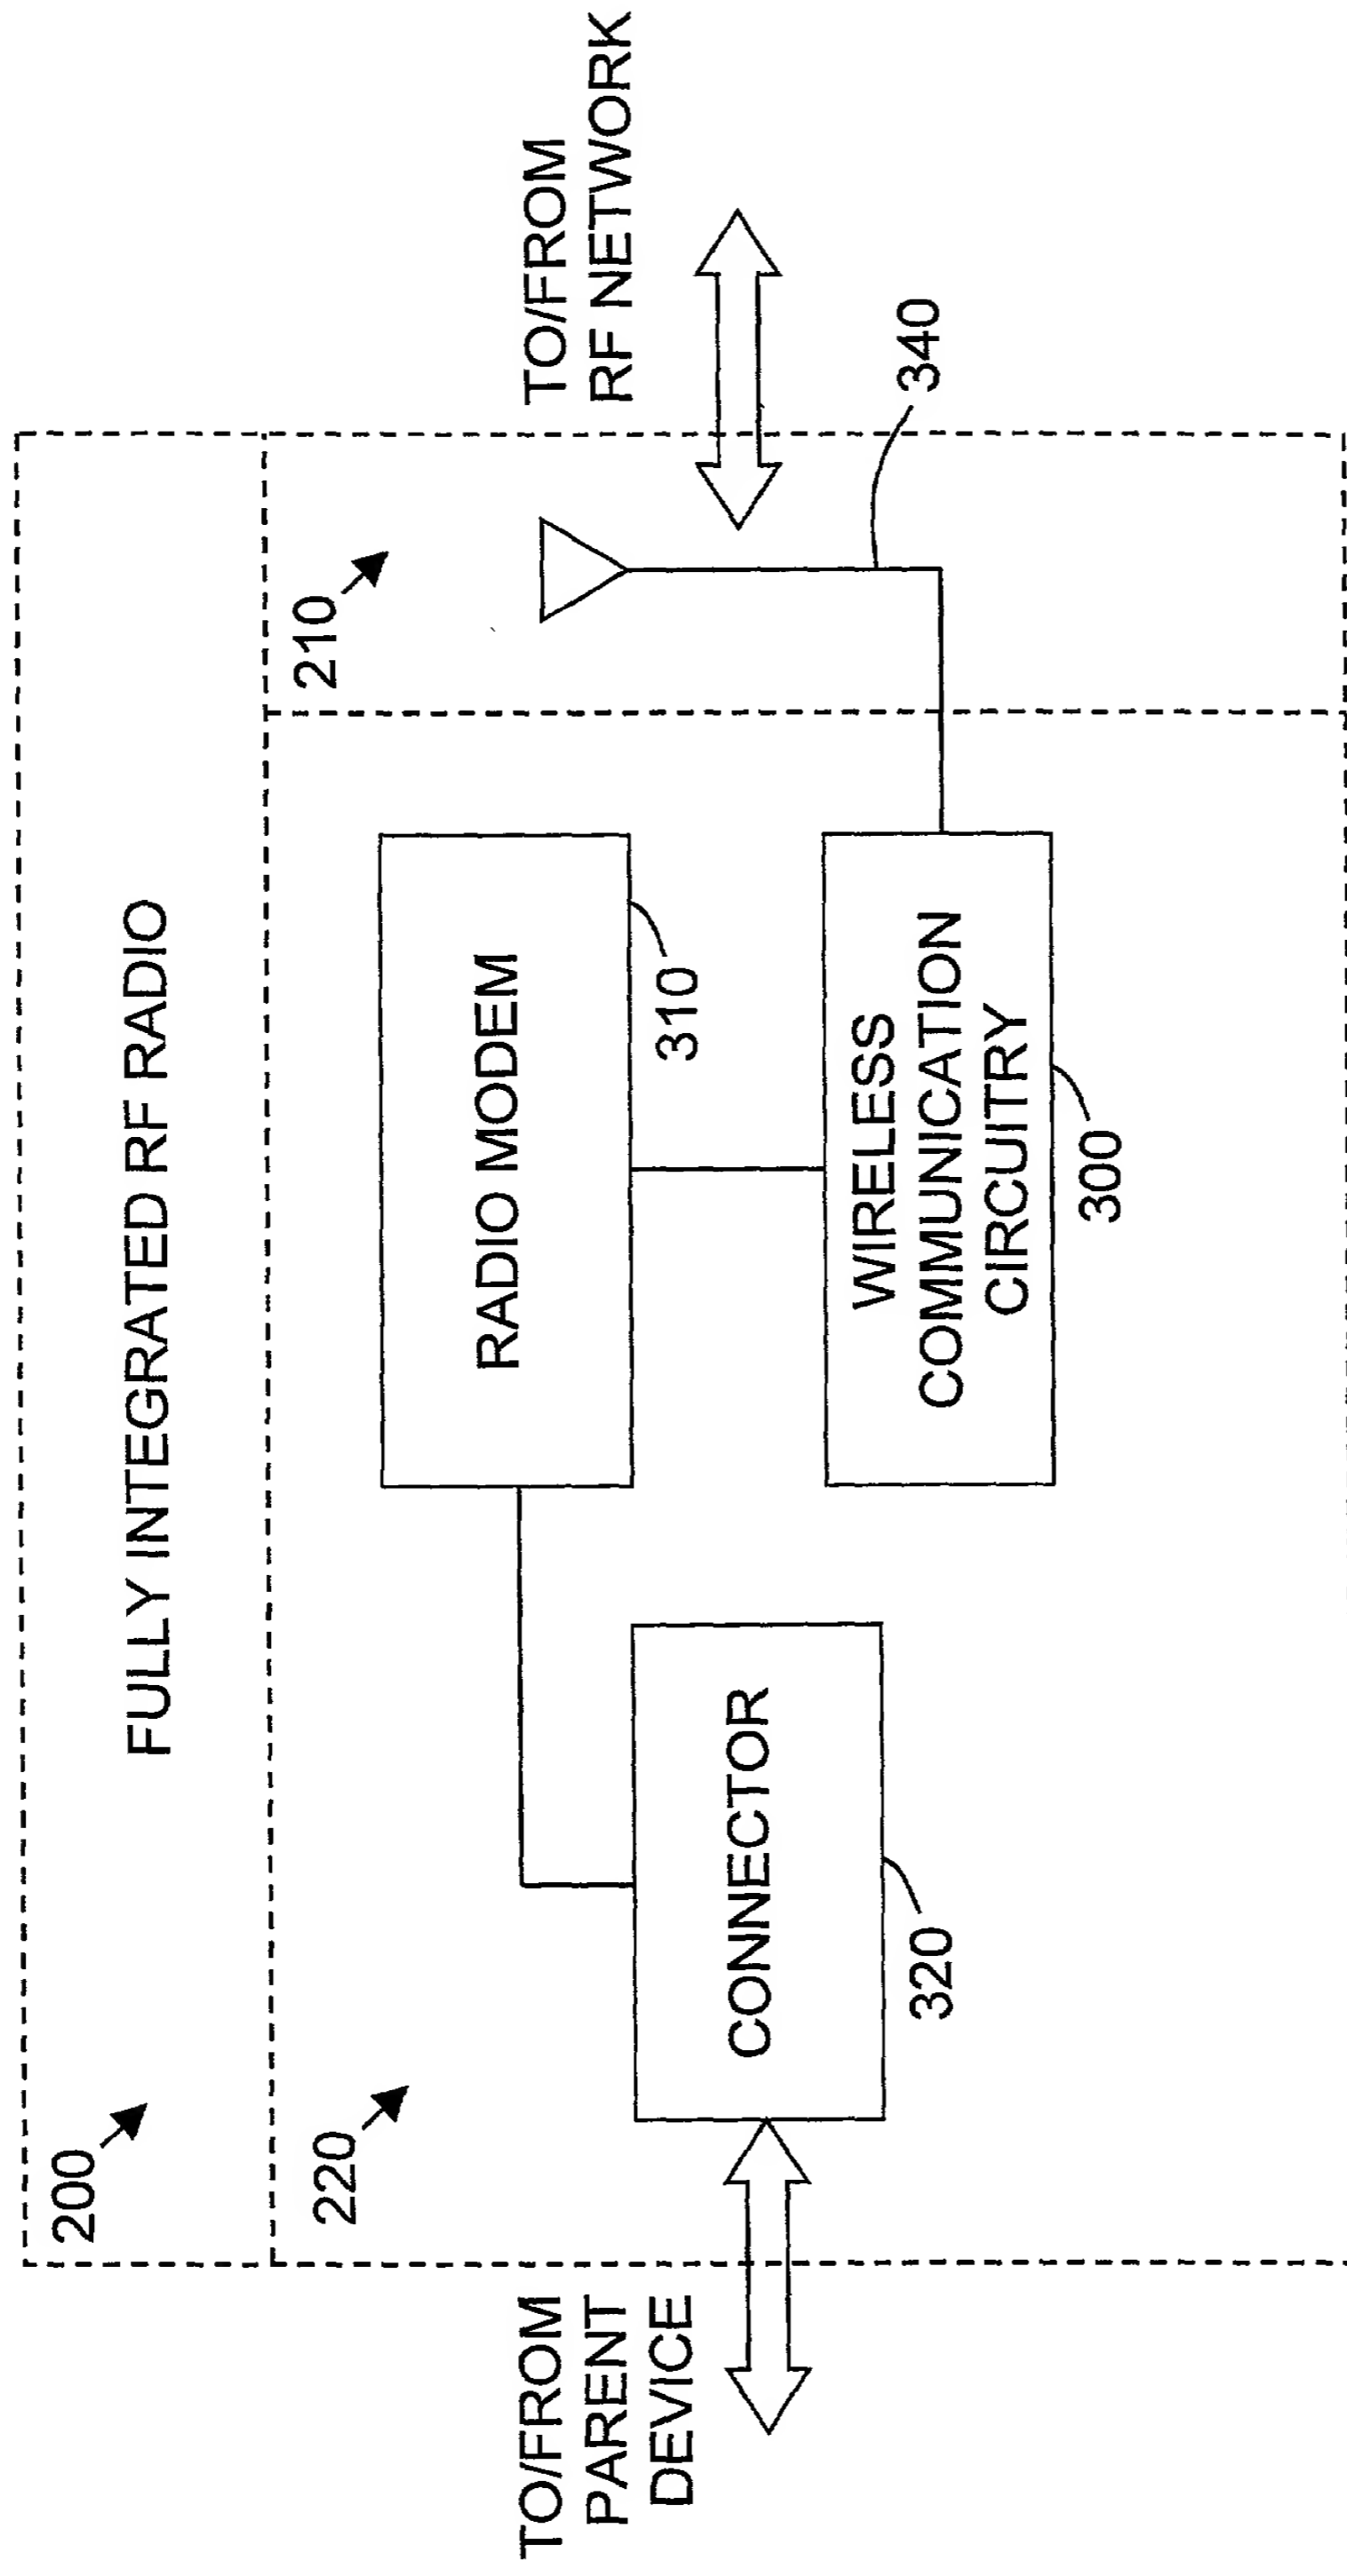


Fig. 2d



**FIG. 3**

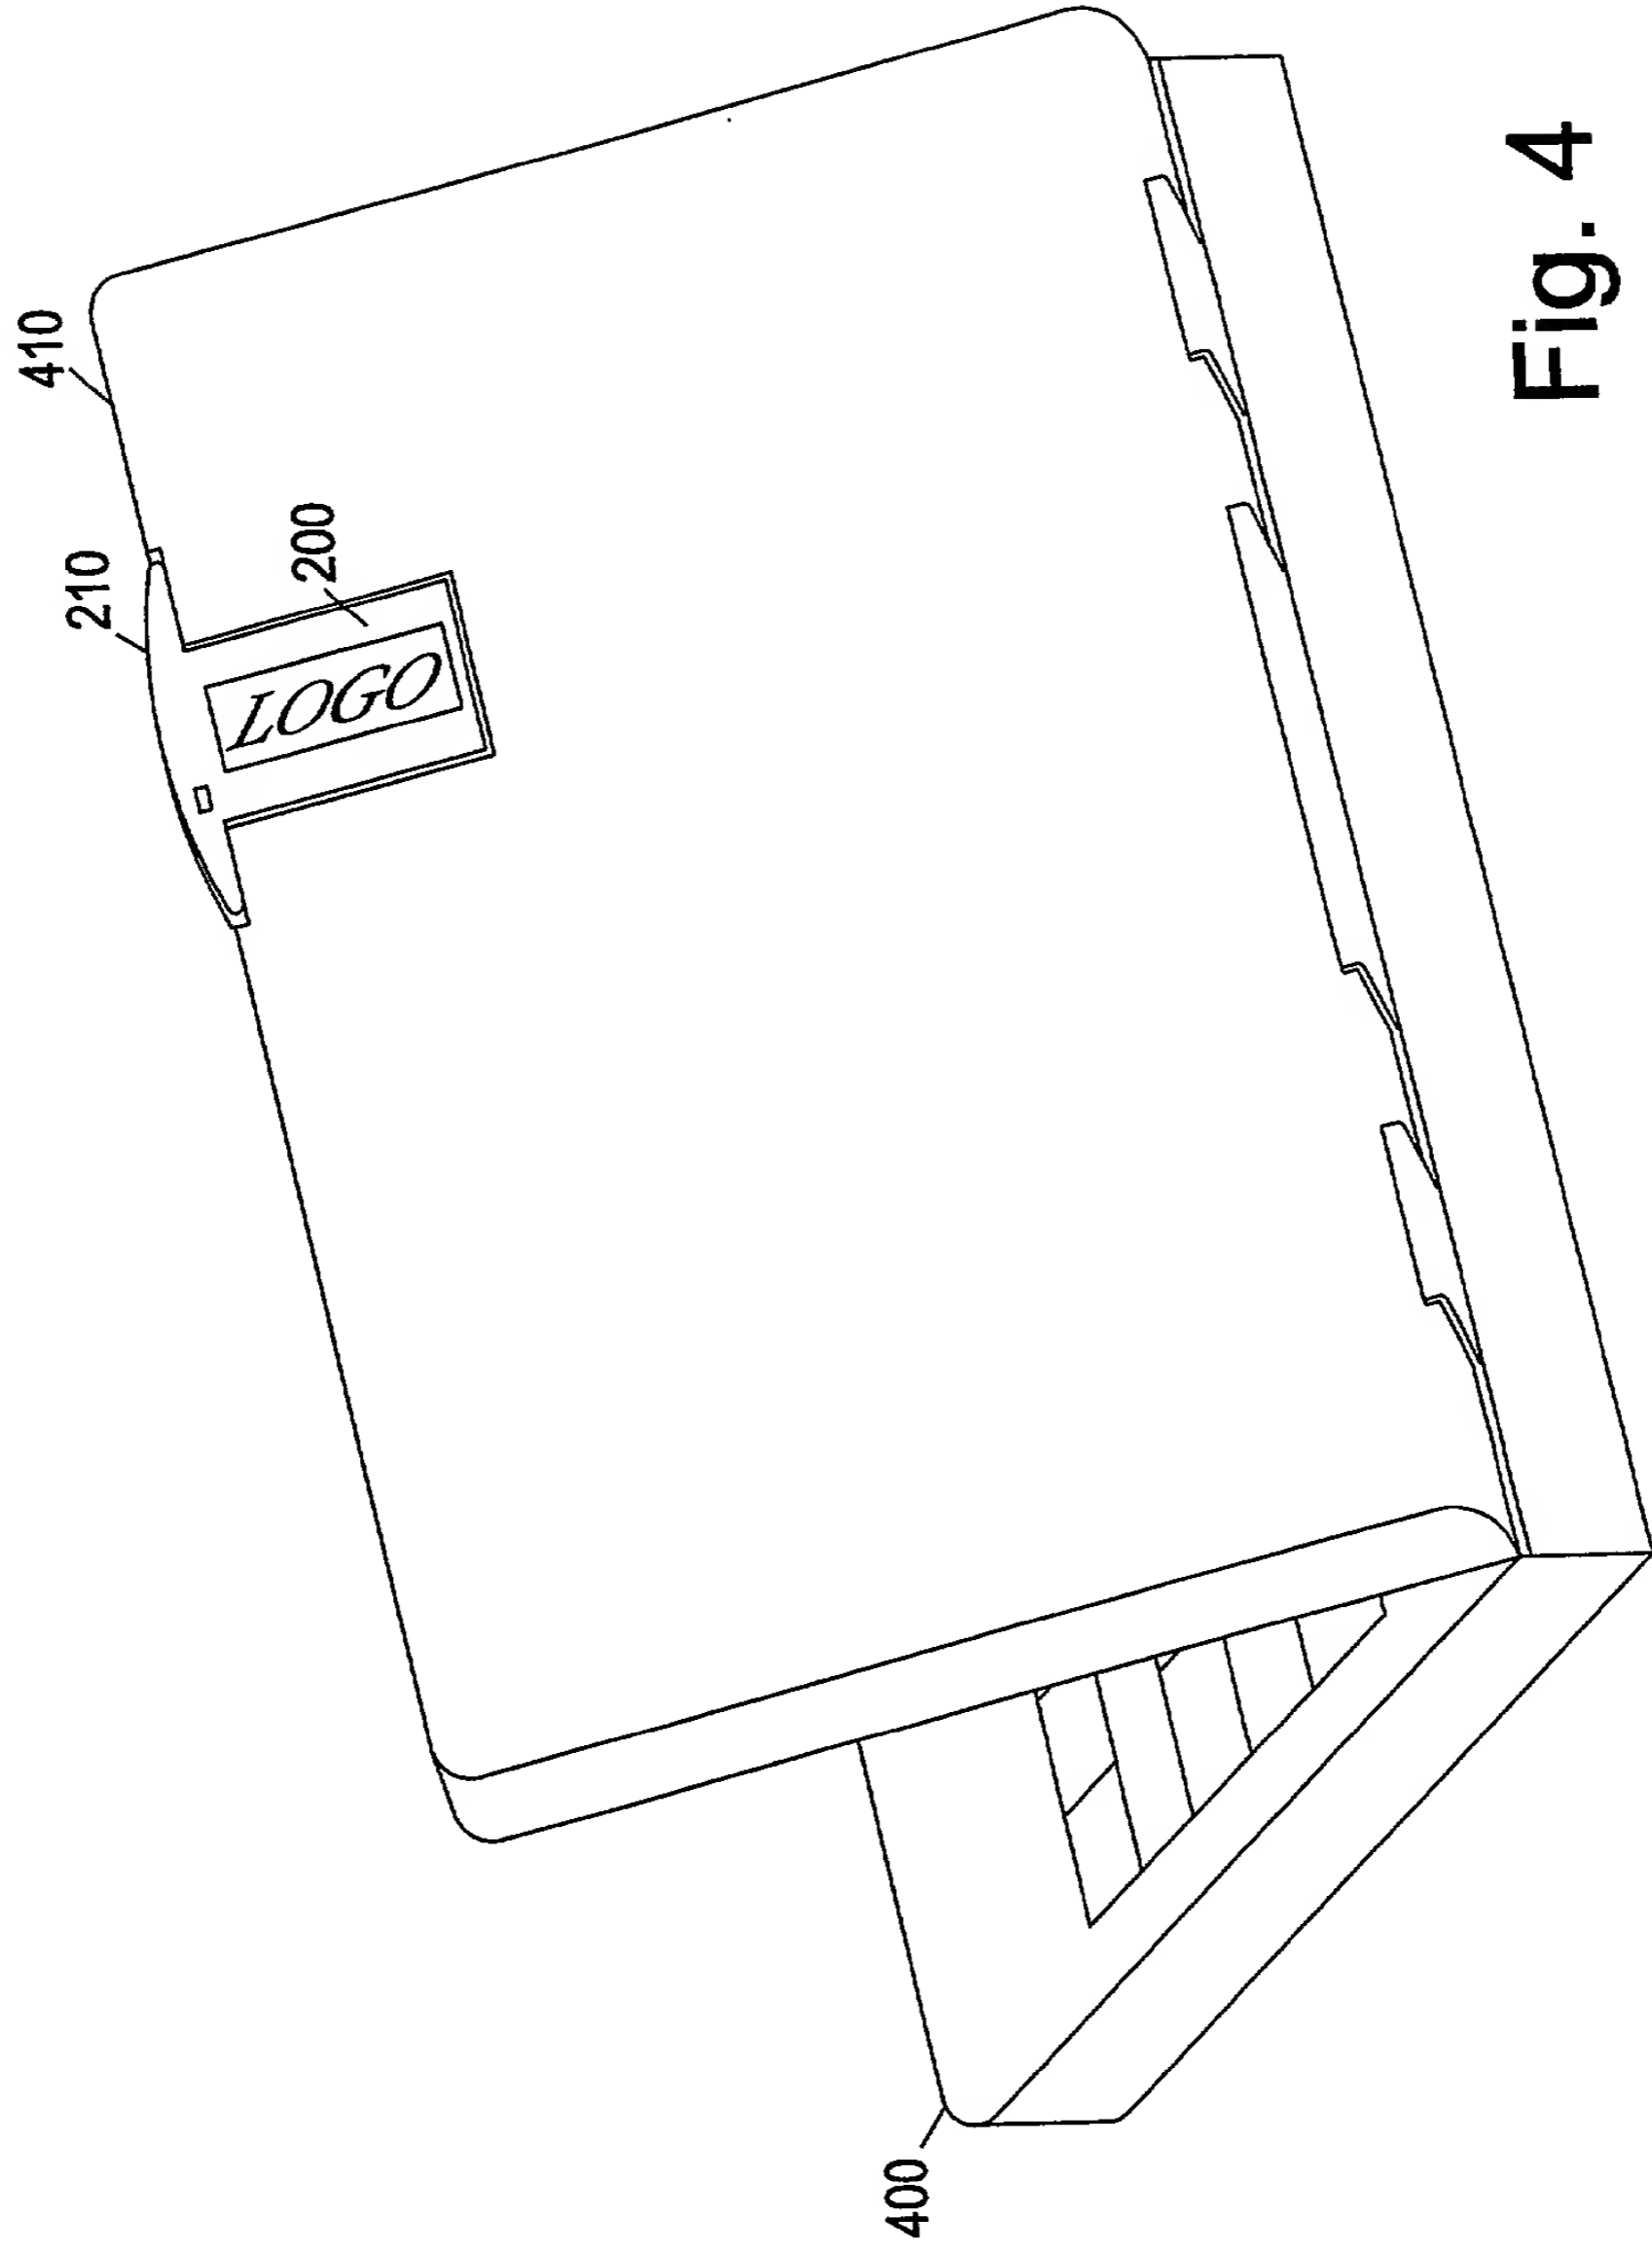


Fig. 4

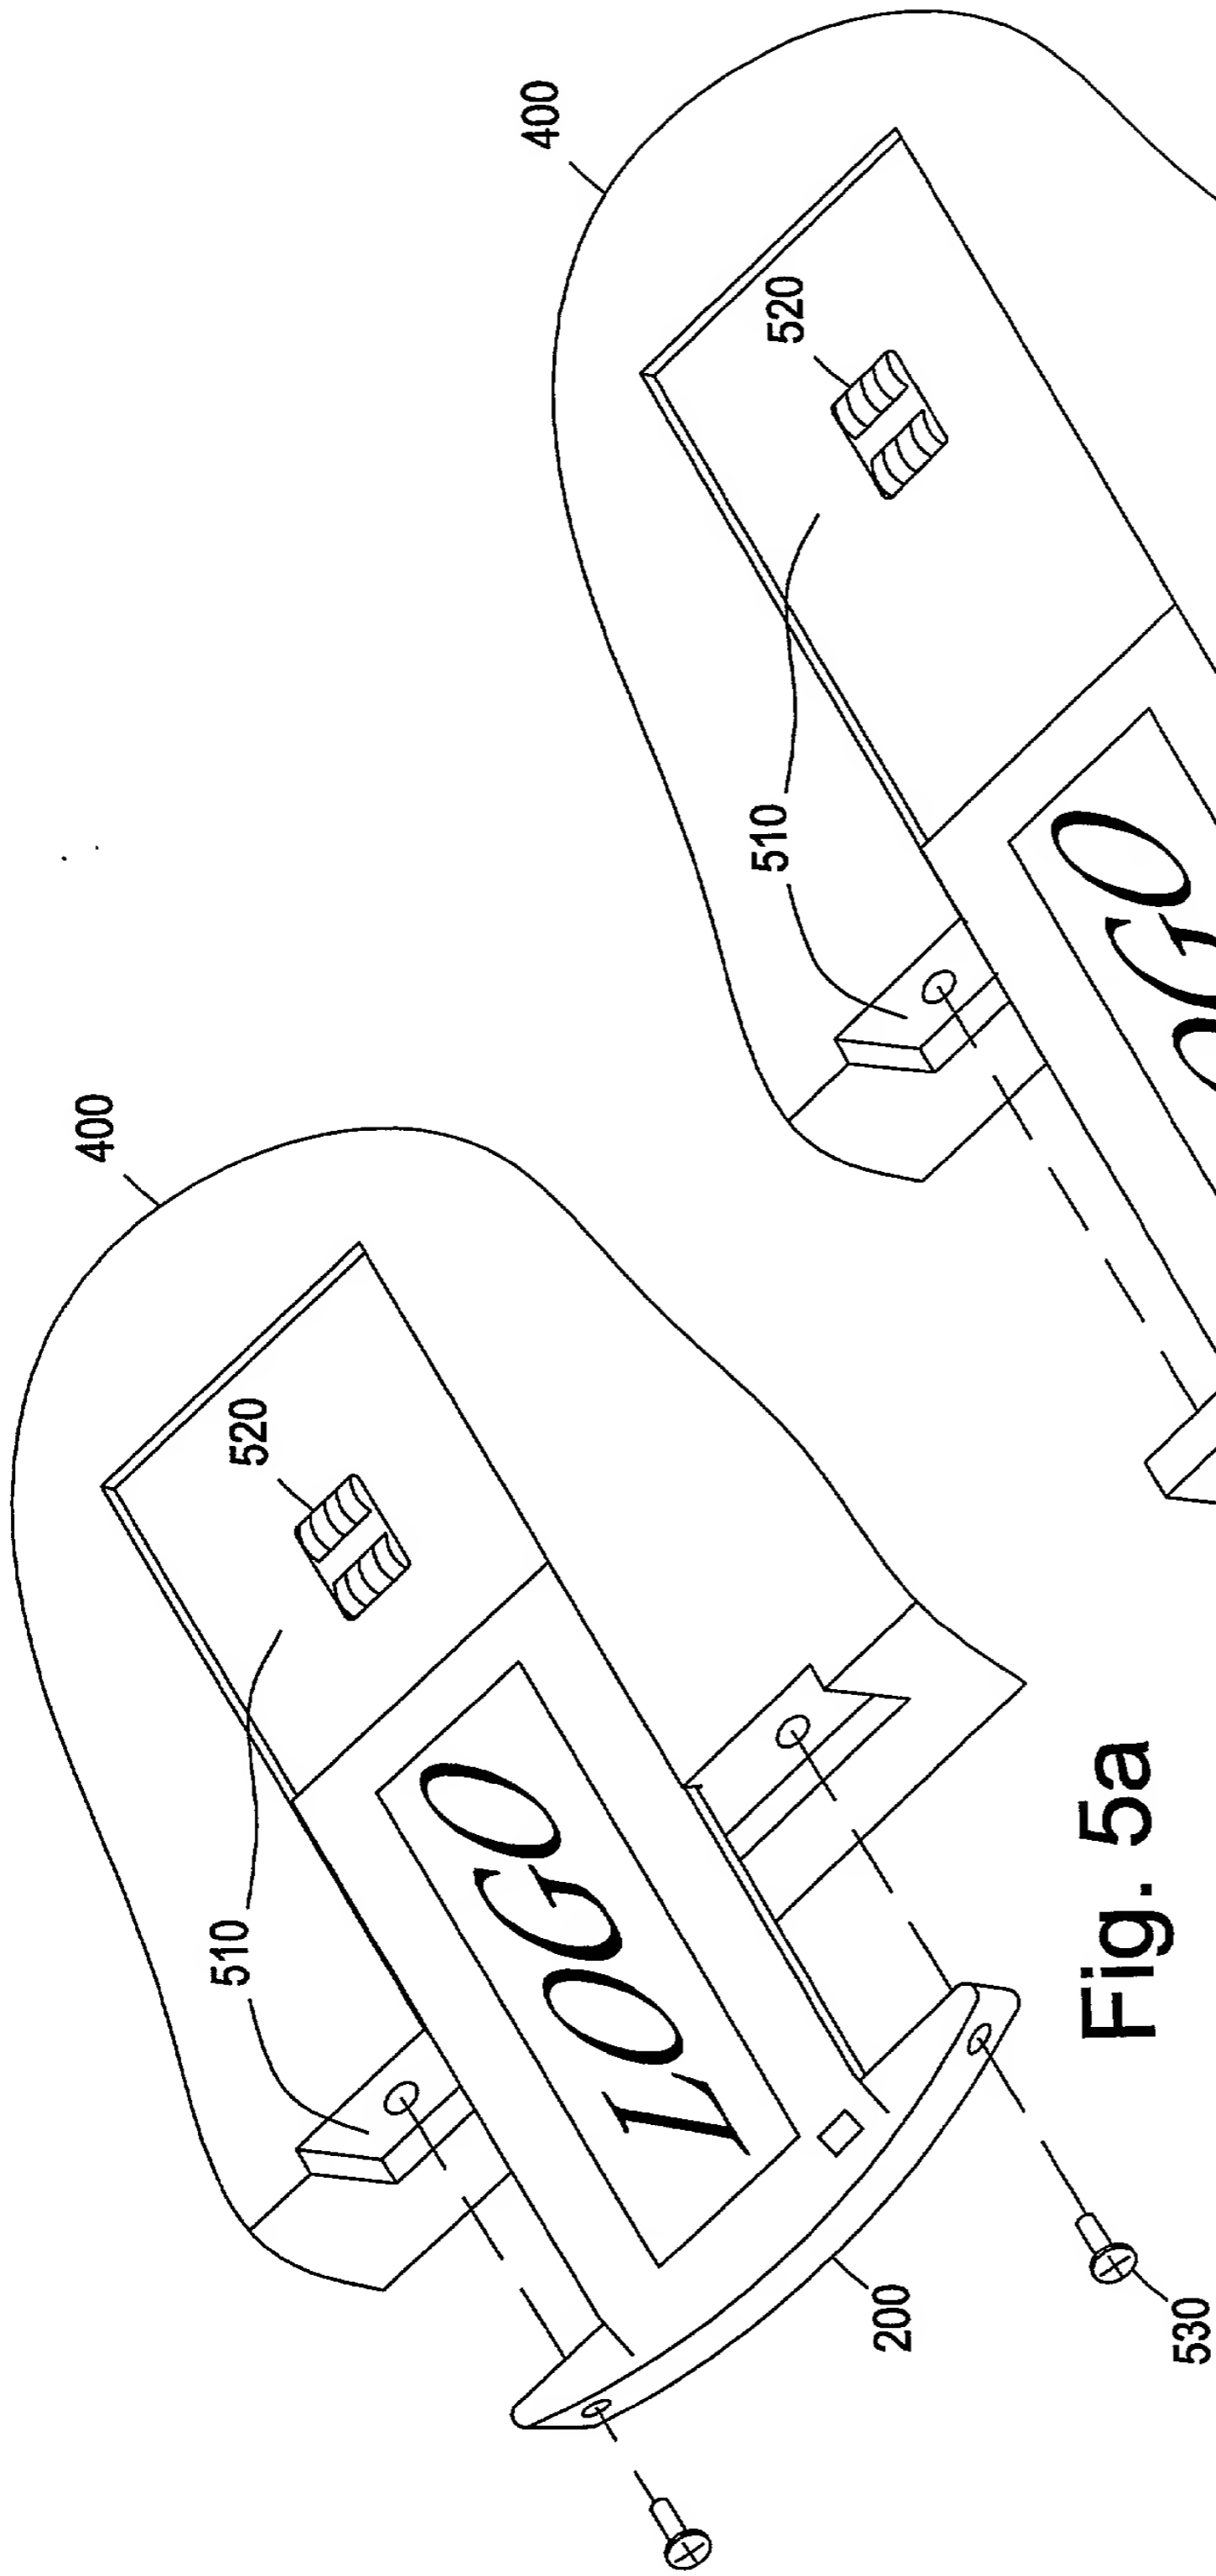


Fig. 5a

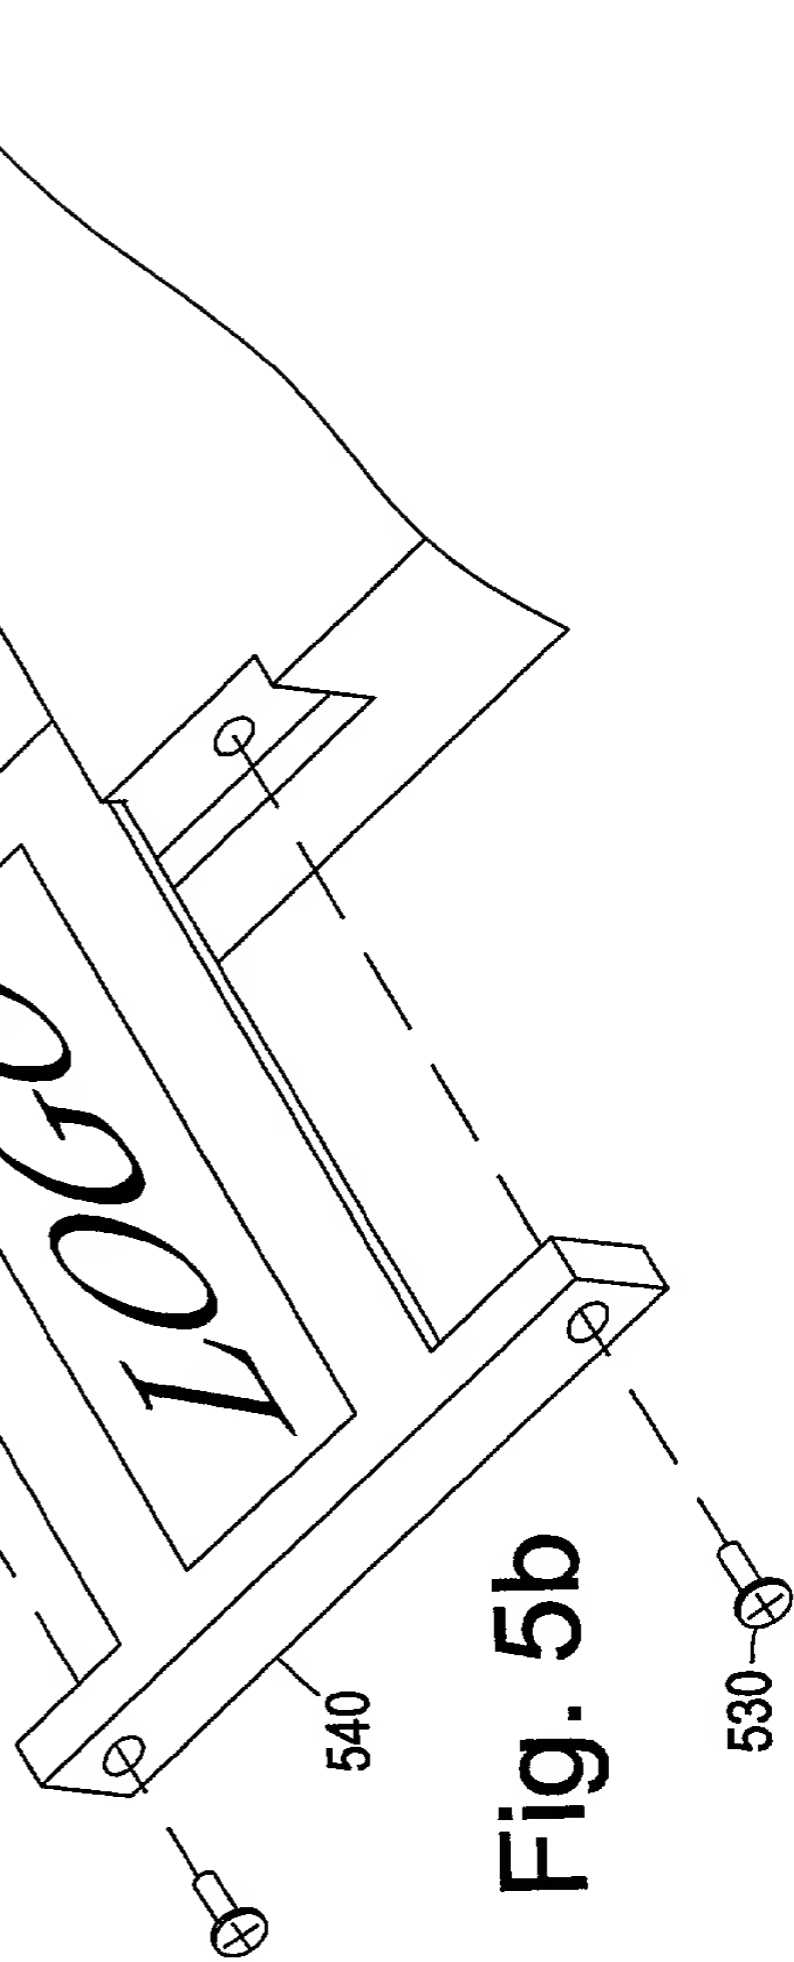


Fig. 5b

Parameter	Value
1. $\alpha_1$	0.0000
2. $\alpha_2$	0.0000
3. $\alpha_3$	0.0000
4. $\alpha_4$	0.0000
5. $\alpha_5$	0.0000
6. $\alpha_6$	0.0000
7. $\alpha_7$	0.0000
8. $\alpha_8$	0.0000
9. $\alpha_9$	0.0000
10. $\alpha_{10}$	0.0000
11. $\alpha_{11}$	0.0000
12. $\alpha_{12}$	0.0000
13. $\alpha_{13}$	0.0000
14. $\alpha_{14}$	0.0000
15. $\alpha_{15}$	0.0000
16. $\alpha_{16}$	0.0000
17. $\alpha_{17}$	0.0000
18. $\alpha_{18}$	0.0000
19. $\alpha_{19}$	0.0000
20. $\alpha_{20}$	0.0000
21. $\alpha_{21}$	0.0000
22. $\alpha_{22}$	0.0000
23. $\alpha_{23}$	0.0000
24. $\alpha_{24}$	0.0000
25. $\alpha_{25}$	0.0000
26. $\alpha_{26}$	0.0000
27. $\alpha_{27}$	0.0000
28. $\alpha_{28}$	0.0000
29. $\alpha_{29}$	0.0000
30. $\alpha_{30}$	0.0000
31. $\alpha_{31}$	0.0000
32. $\alpha_{32}$	0.0000
33. $\alpha_{33}$	0.0000
34. $\alpha_{34}$	0.0000
35. $\alpha_{35}$	0.0000
36. $\alpha_{36}$	0.0000
37. $\alpha_{37}$	0.0000
38. $\alpha_{38}$	0.0000
39. $\alpha_{39}$	0.0000
40. $\alpha_{40}$	0.0000
41. $\alpha_{41}$	0.0000
42. $\alpha_{42}$	0.0000
43. $\alpha_{43}$	0.0000
44. $\alpha_{44}$	0.0000
45. $\alpha_{45}$	0.0000
46. $\alpha_{46}$	0.0000
47. $\alpha_{47}$	0.0000
48. $\alpha_{48}$	0.0000
49. $\alpha_{49}$	0.0000
50. $\alpha_{50}$	0.0000
51. $\alpha_{51}$	0.0000
52. $\alpha_{52}$	0.0000
53. $\alpha_{53}$	0.0000
54. $\alpha_{54}$	0.0000
55. $\alpha_{55}$	0.0000
56. $\alpha_{56}$	0.0000
57. $\alpha_{57}$	0.0000
58. $\alpha_{58}$	0.0000
59. $\alpha_{59}$	0.0000
60. $\alpha_{60}$	0.0000
61. $\alpha_{61}$	0.0000
62. $\alpha_{62}$	0.0000
63. $\alpha_{63}$	0.0000
64. $\alpha_{64}$	0.0000
65. $\alpha_{65}$	0.0000
66. $\alpha_{66}$	0.0000
67. $\alpha_{67}$	0.0000
68. $\alpha_{68}$	0.0000
69. $\alpha_{69}$	0.0000
70. $\alpha_{70}$	0.0000
71. $\alpha_{71}$	0.0000
72. $\alpha_{72}$	0.0000
73. $\alpha_{73}$	0.0000
74. $\alpha_{74}$	0.0000
75. $\alpha_{75}$	0.0000
76. $\alpha_{76}$	0.0000
77. $\alpha_{77}$	0.0000
78. $\alpha_{78}$	0.0000
79. $\alpha_{79}$	0.0000
80. $\alpha_{80}$	0.0000
81. $\alpha_{81}$	0.0000
82. $\alpha_{82}$	0.0000
83. $\alpha_{83}$	0.0000
84. $\alpha_{84}$	0.0000
85. $\alpha_{85}$	0.0000
86. $\alpha_{86}$	0.0000
87. $\alpha_{87}$	0.0000
88. $\alpha_{88}$	0.0000
89. $\alpha_{89}$	0.0000
90. $\alpha_{90}$	0.0000
91. $\alpha_{91}$	0.0000
92. $\alpha_{92}$	0.0000
93. $\alpha_{93}$	0.0000
94. $\alpha_{94}$	0.0000
95. $\alpha_{95}$	0.0000
96. $\alpha_{96}$	0.0000
97. $\alpha_{97}$	0.0000
98. $\alpha_{98}$	0.0000
99. $\alpha_{99}$	0.0000
100. $\alpha_{100}$	0.0000

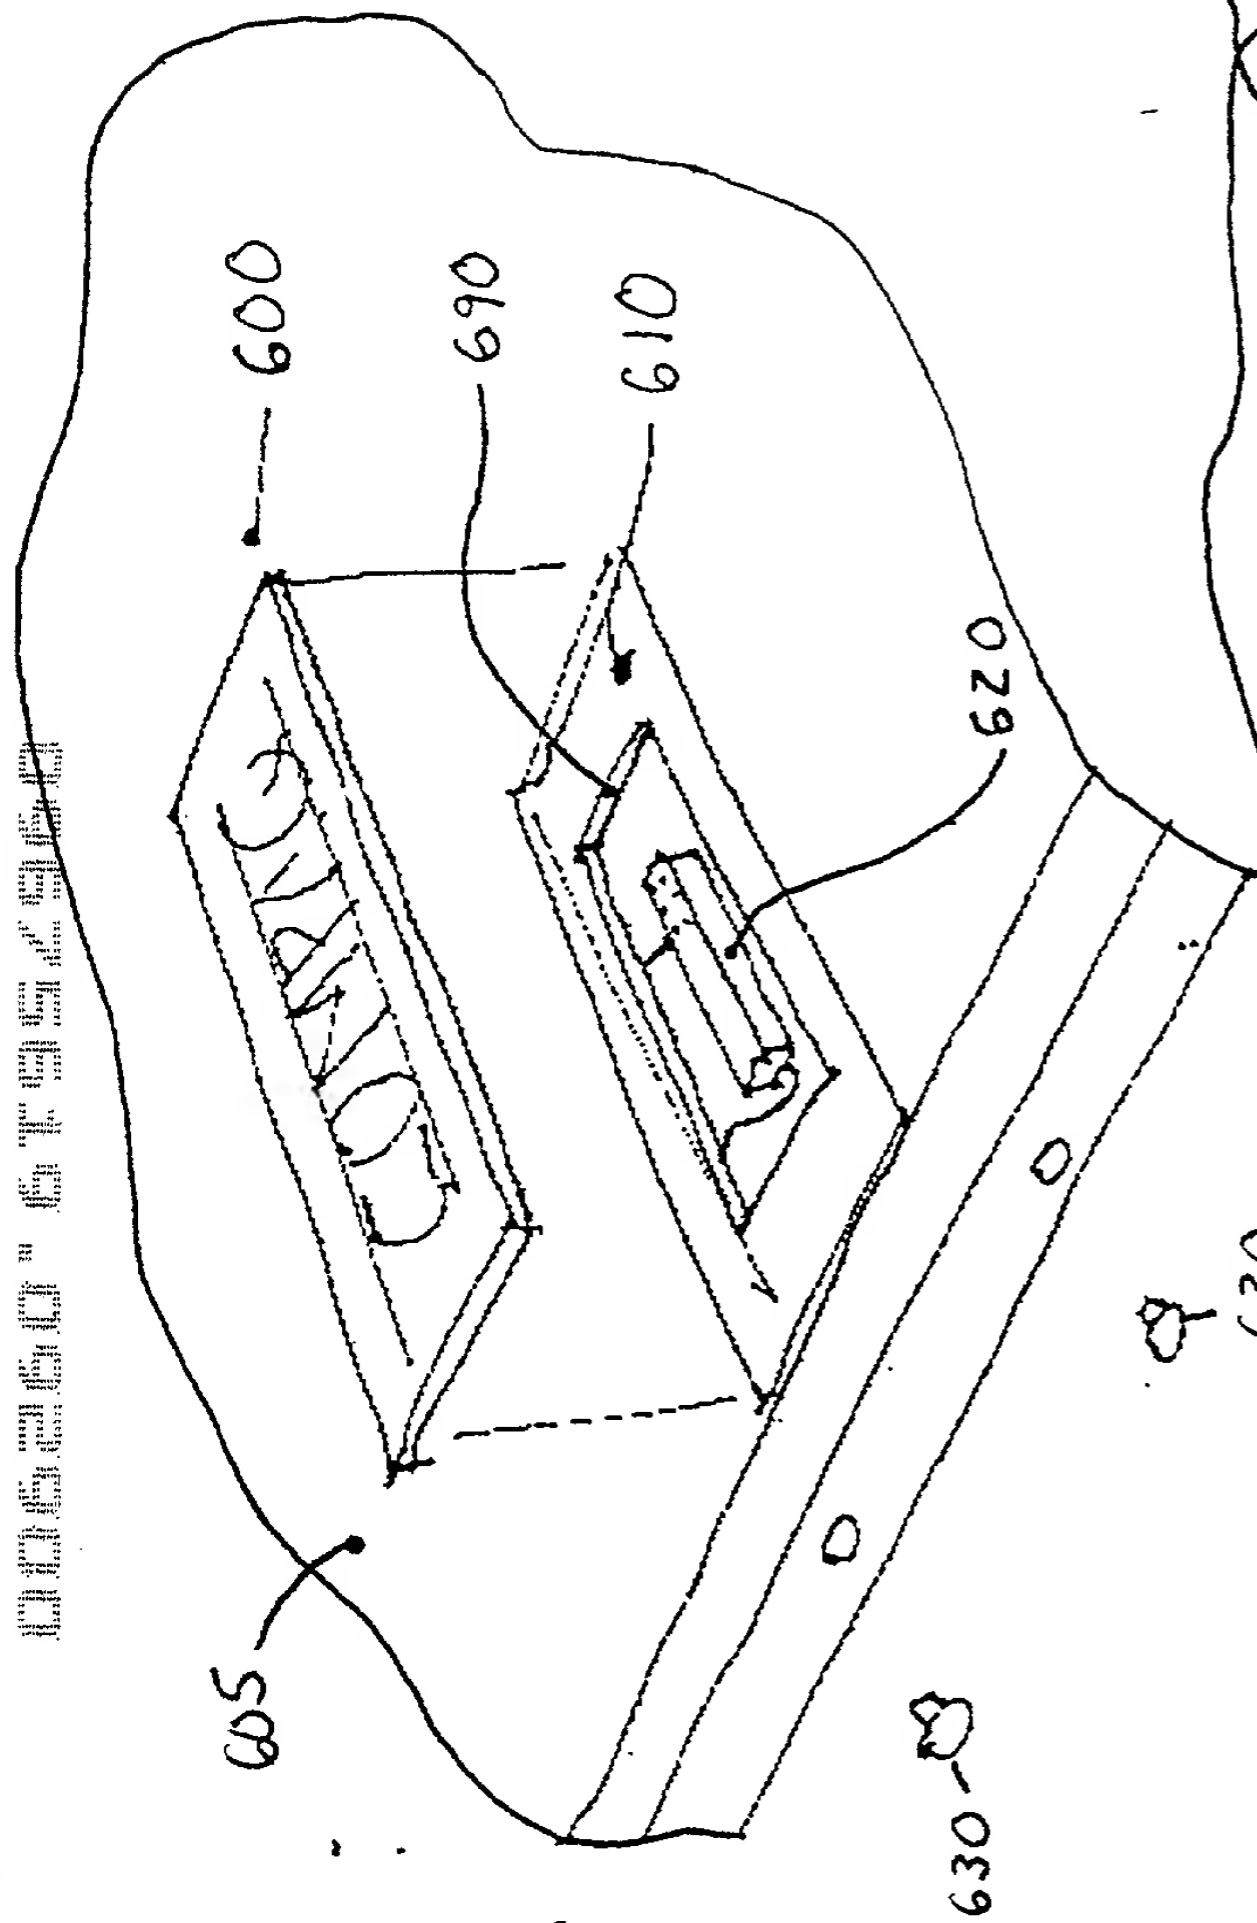


FIG. 6a

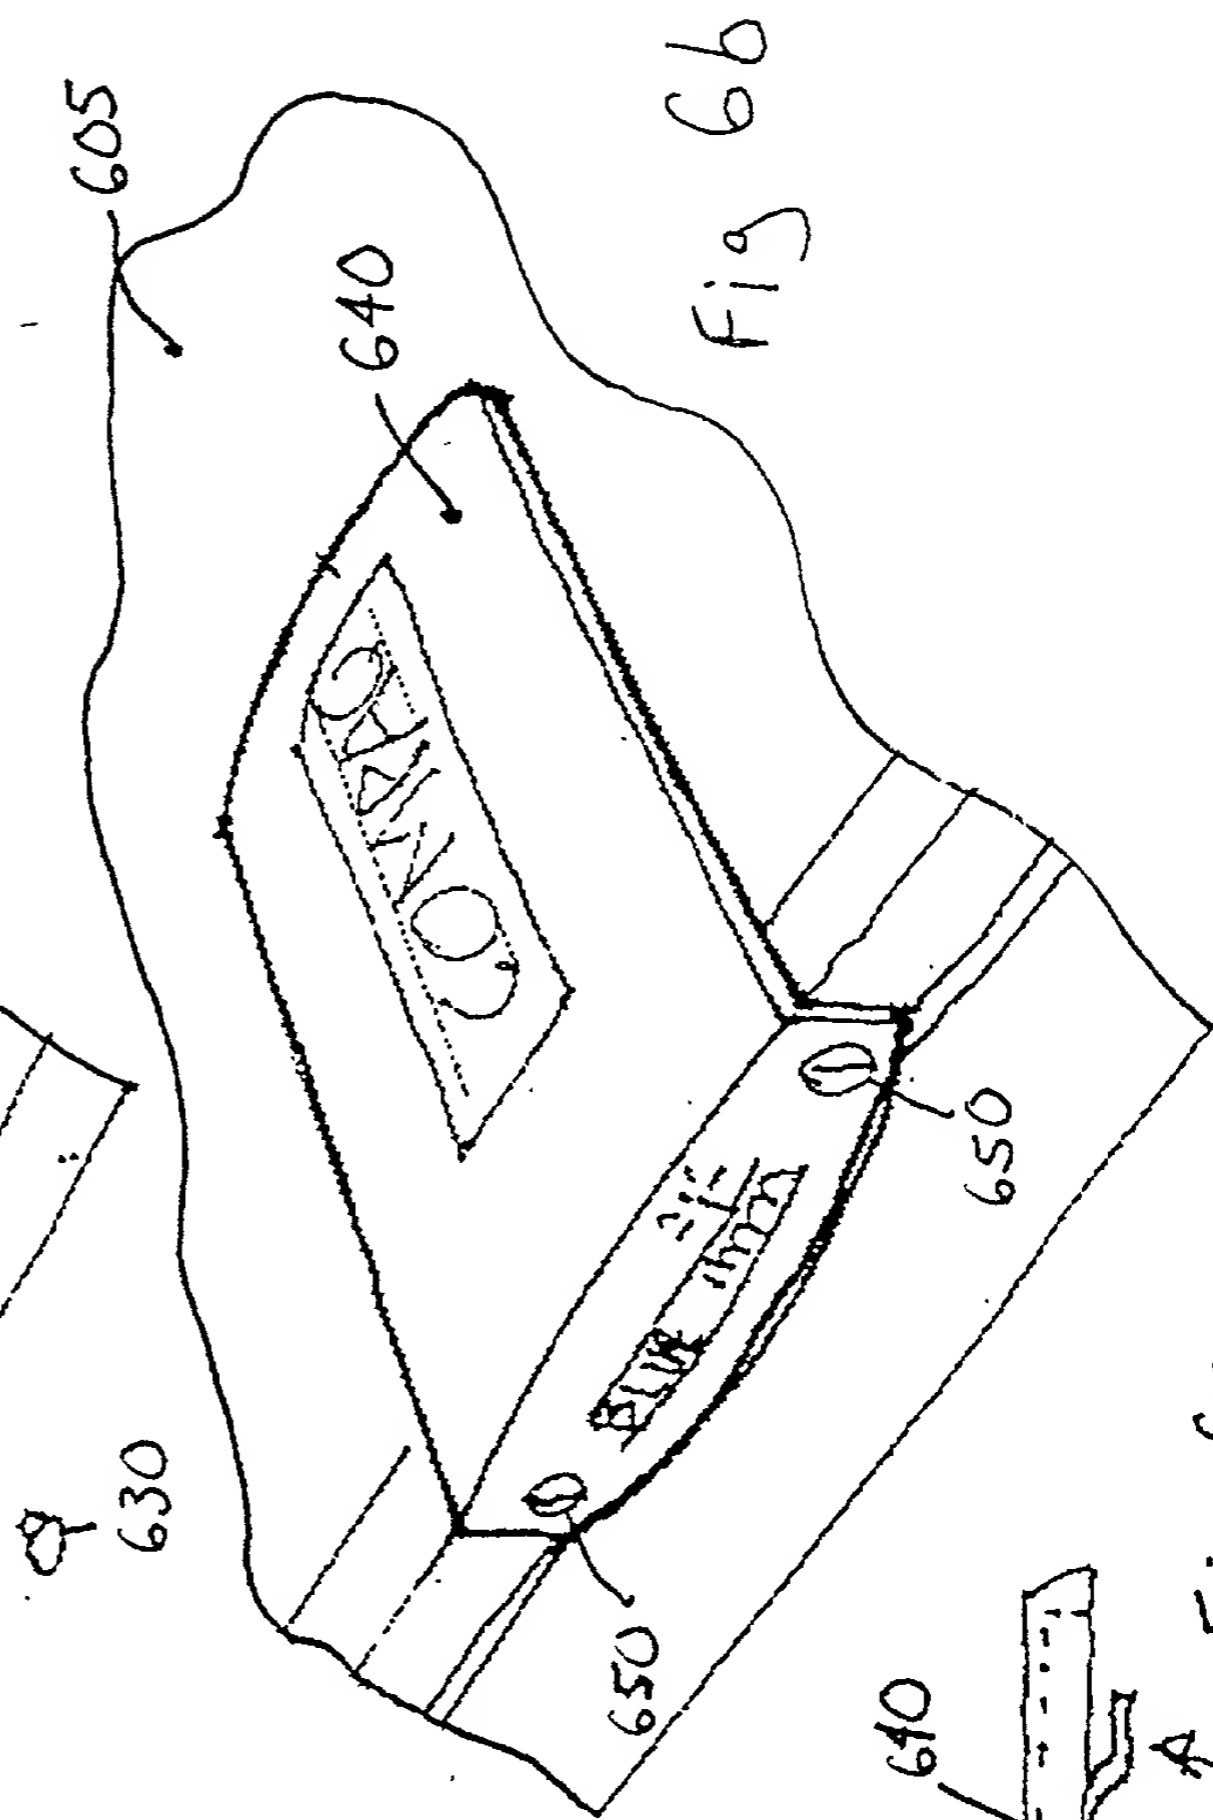


Fig 66

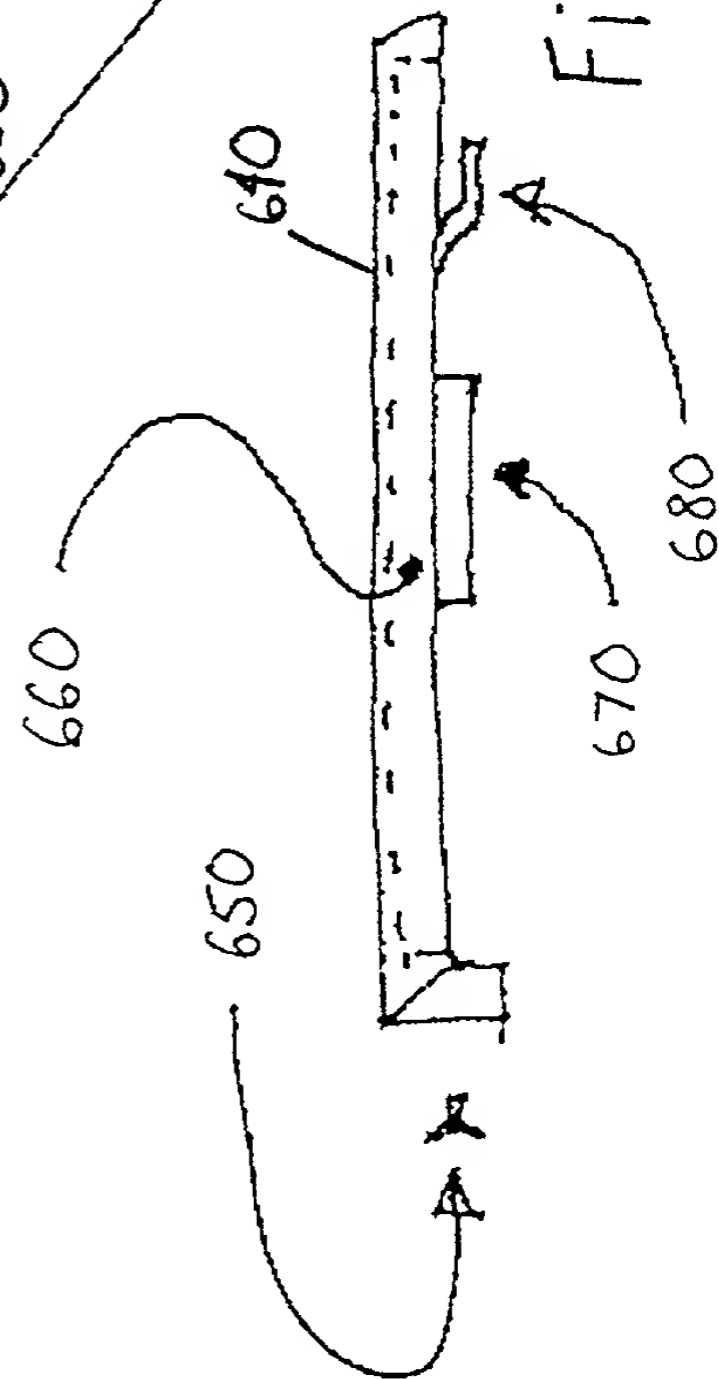


Fig 6C

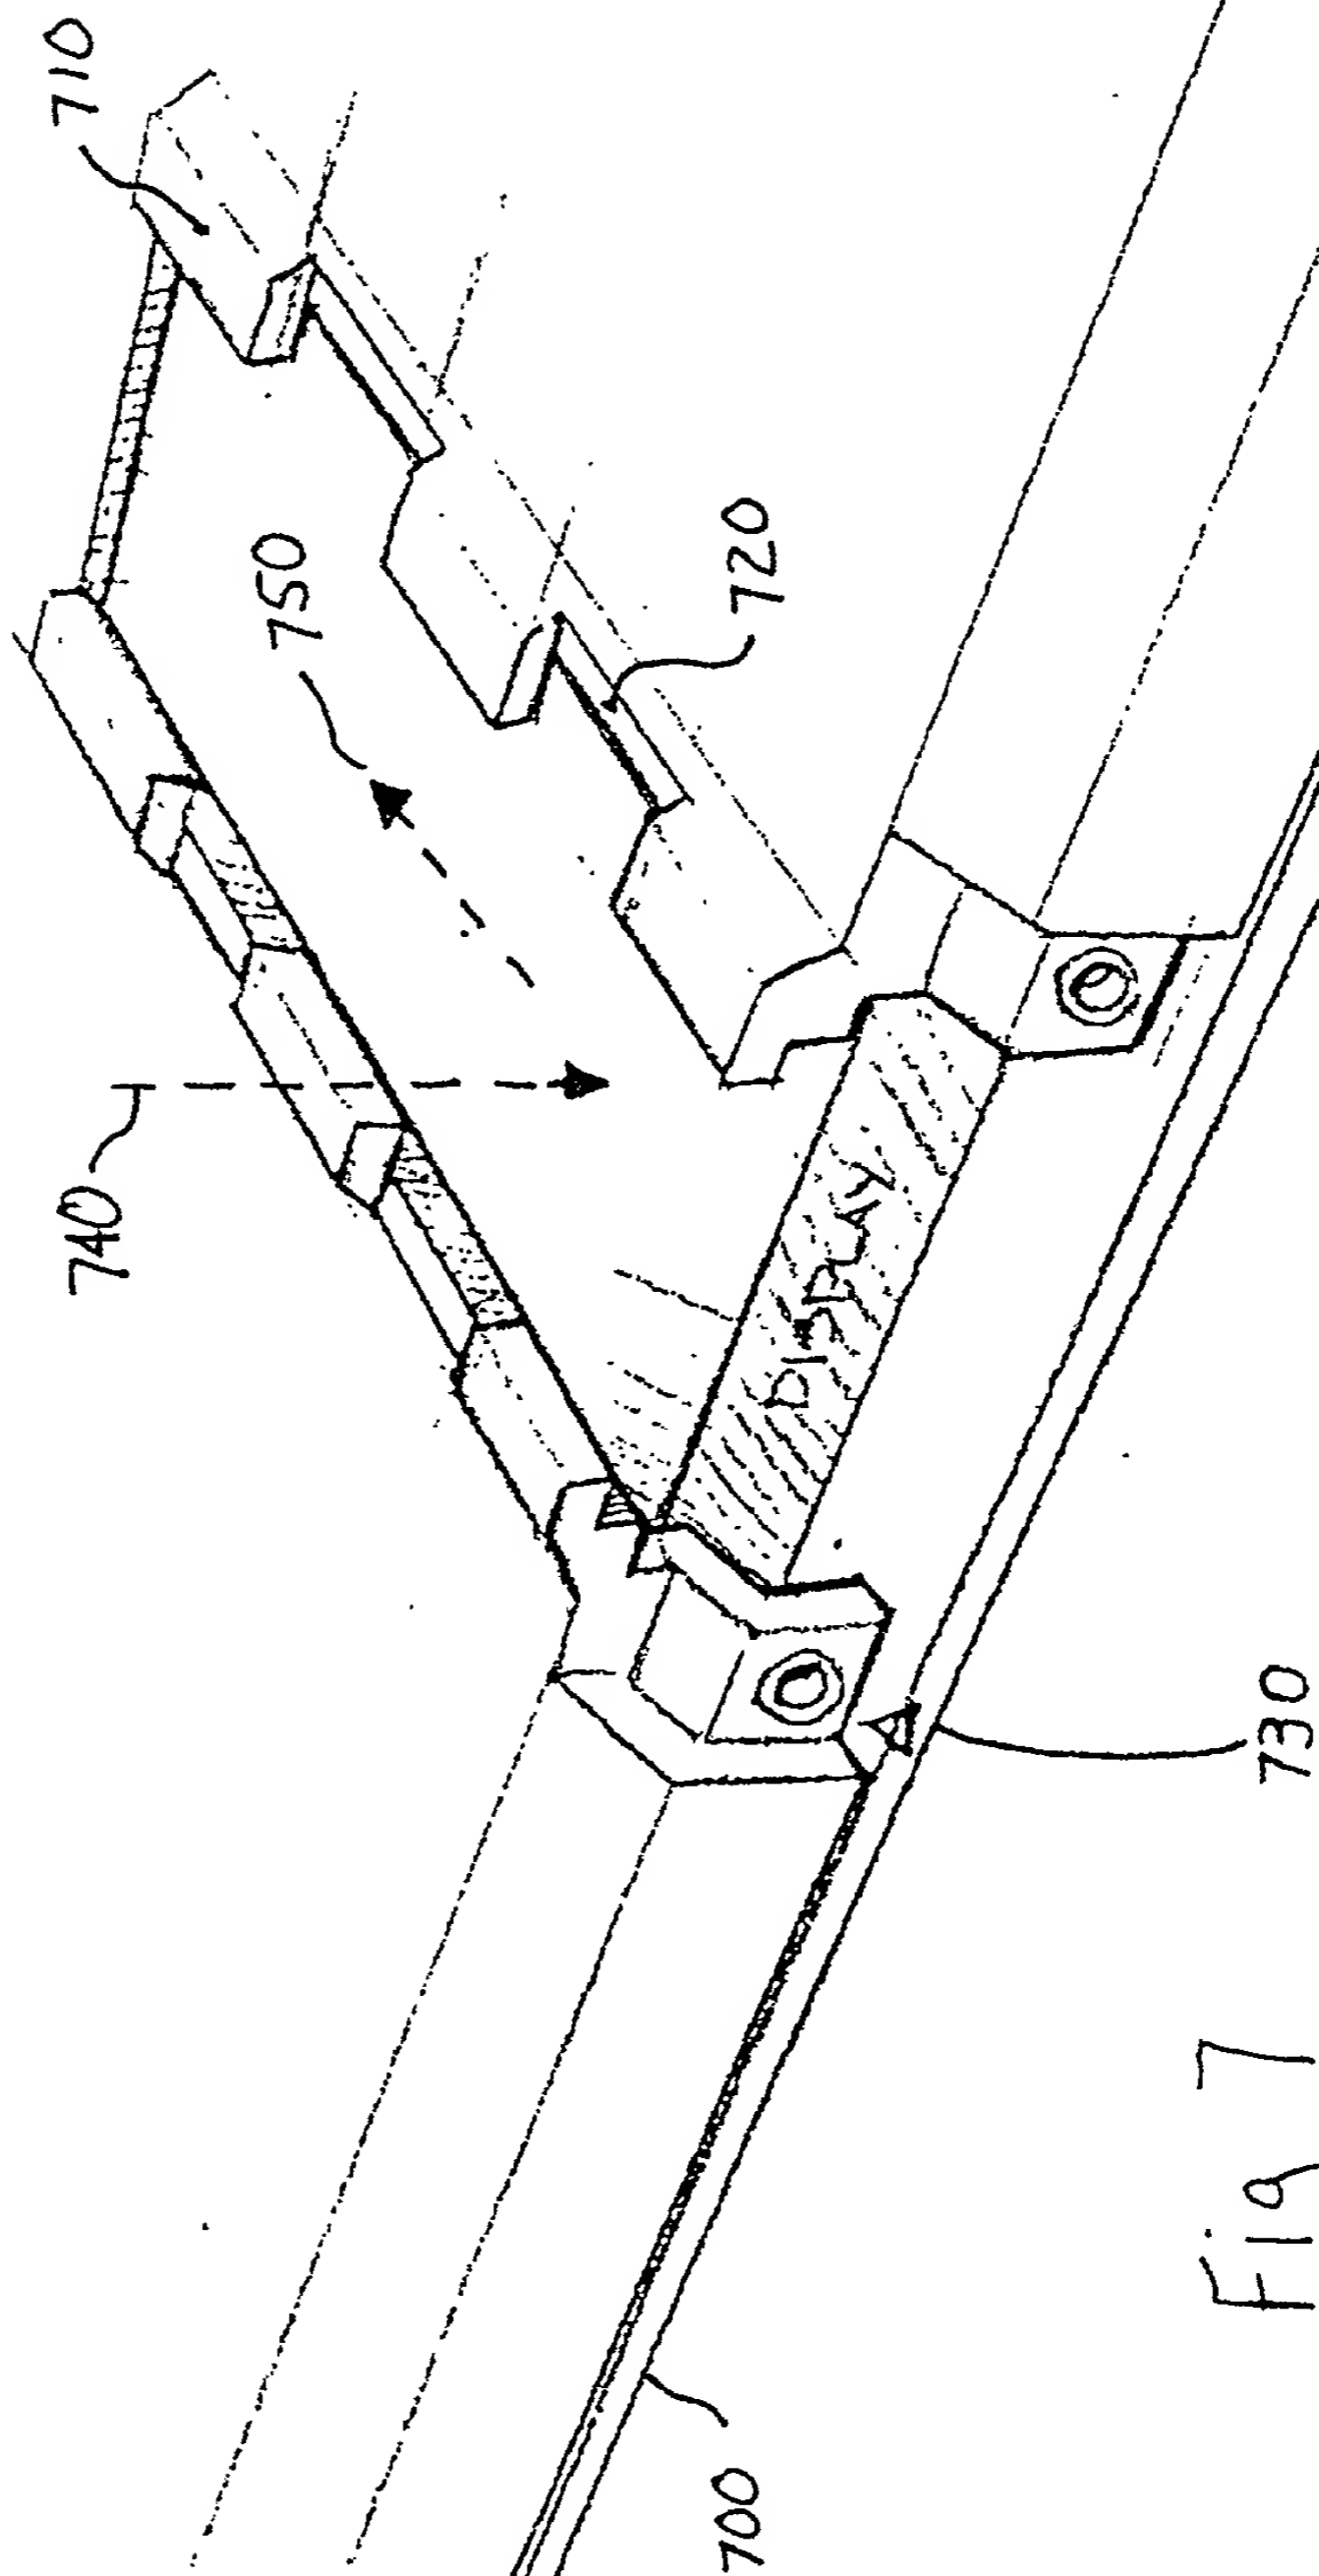


Fig 7

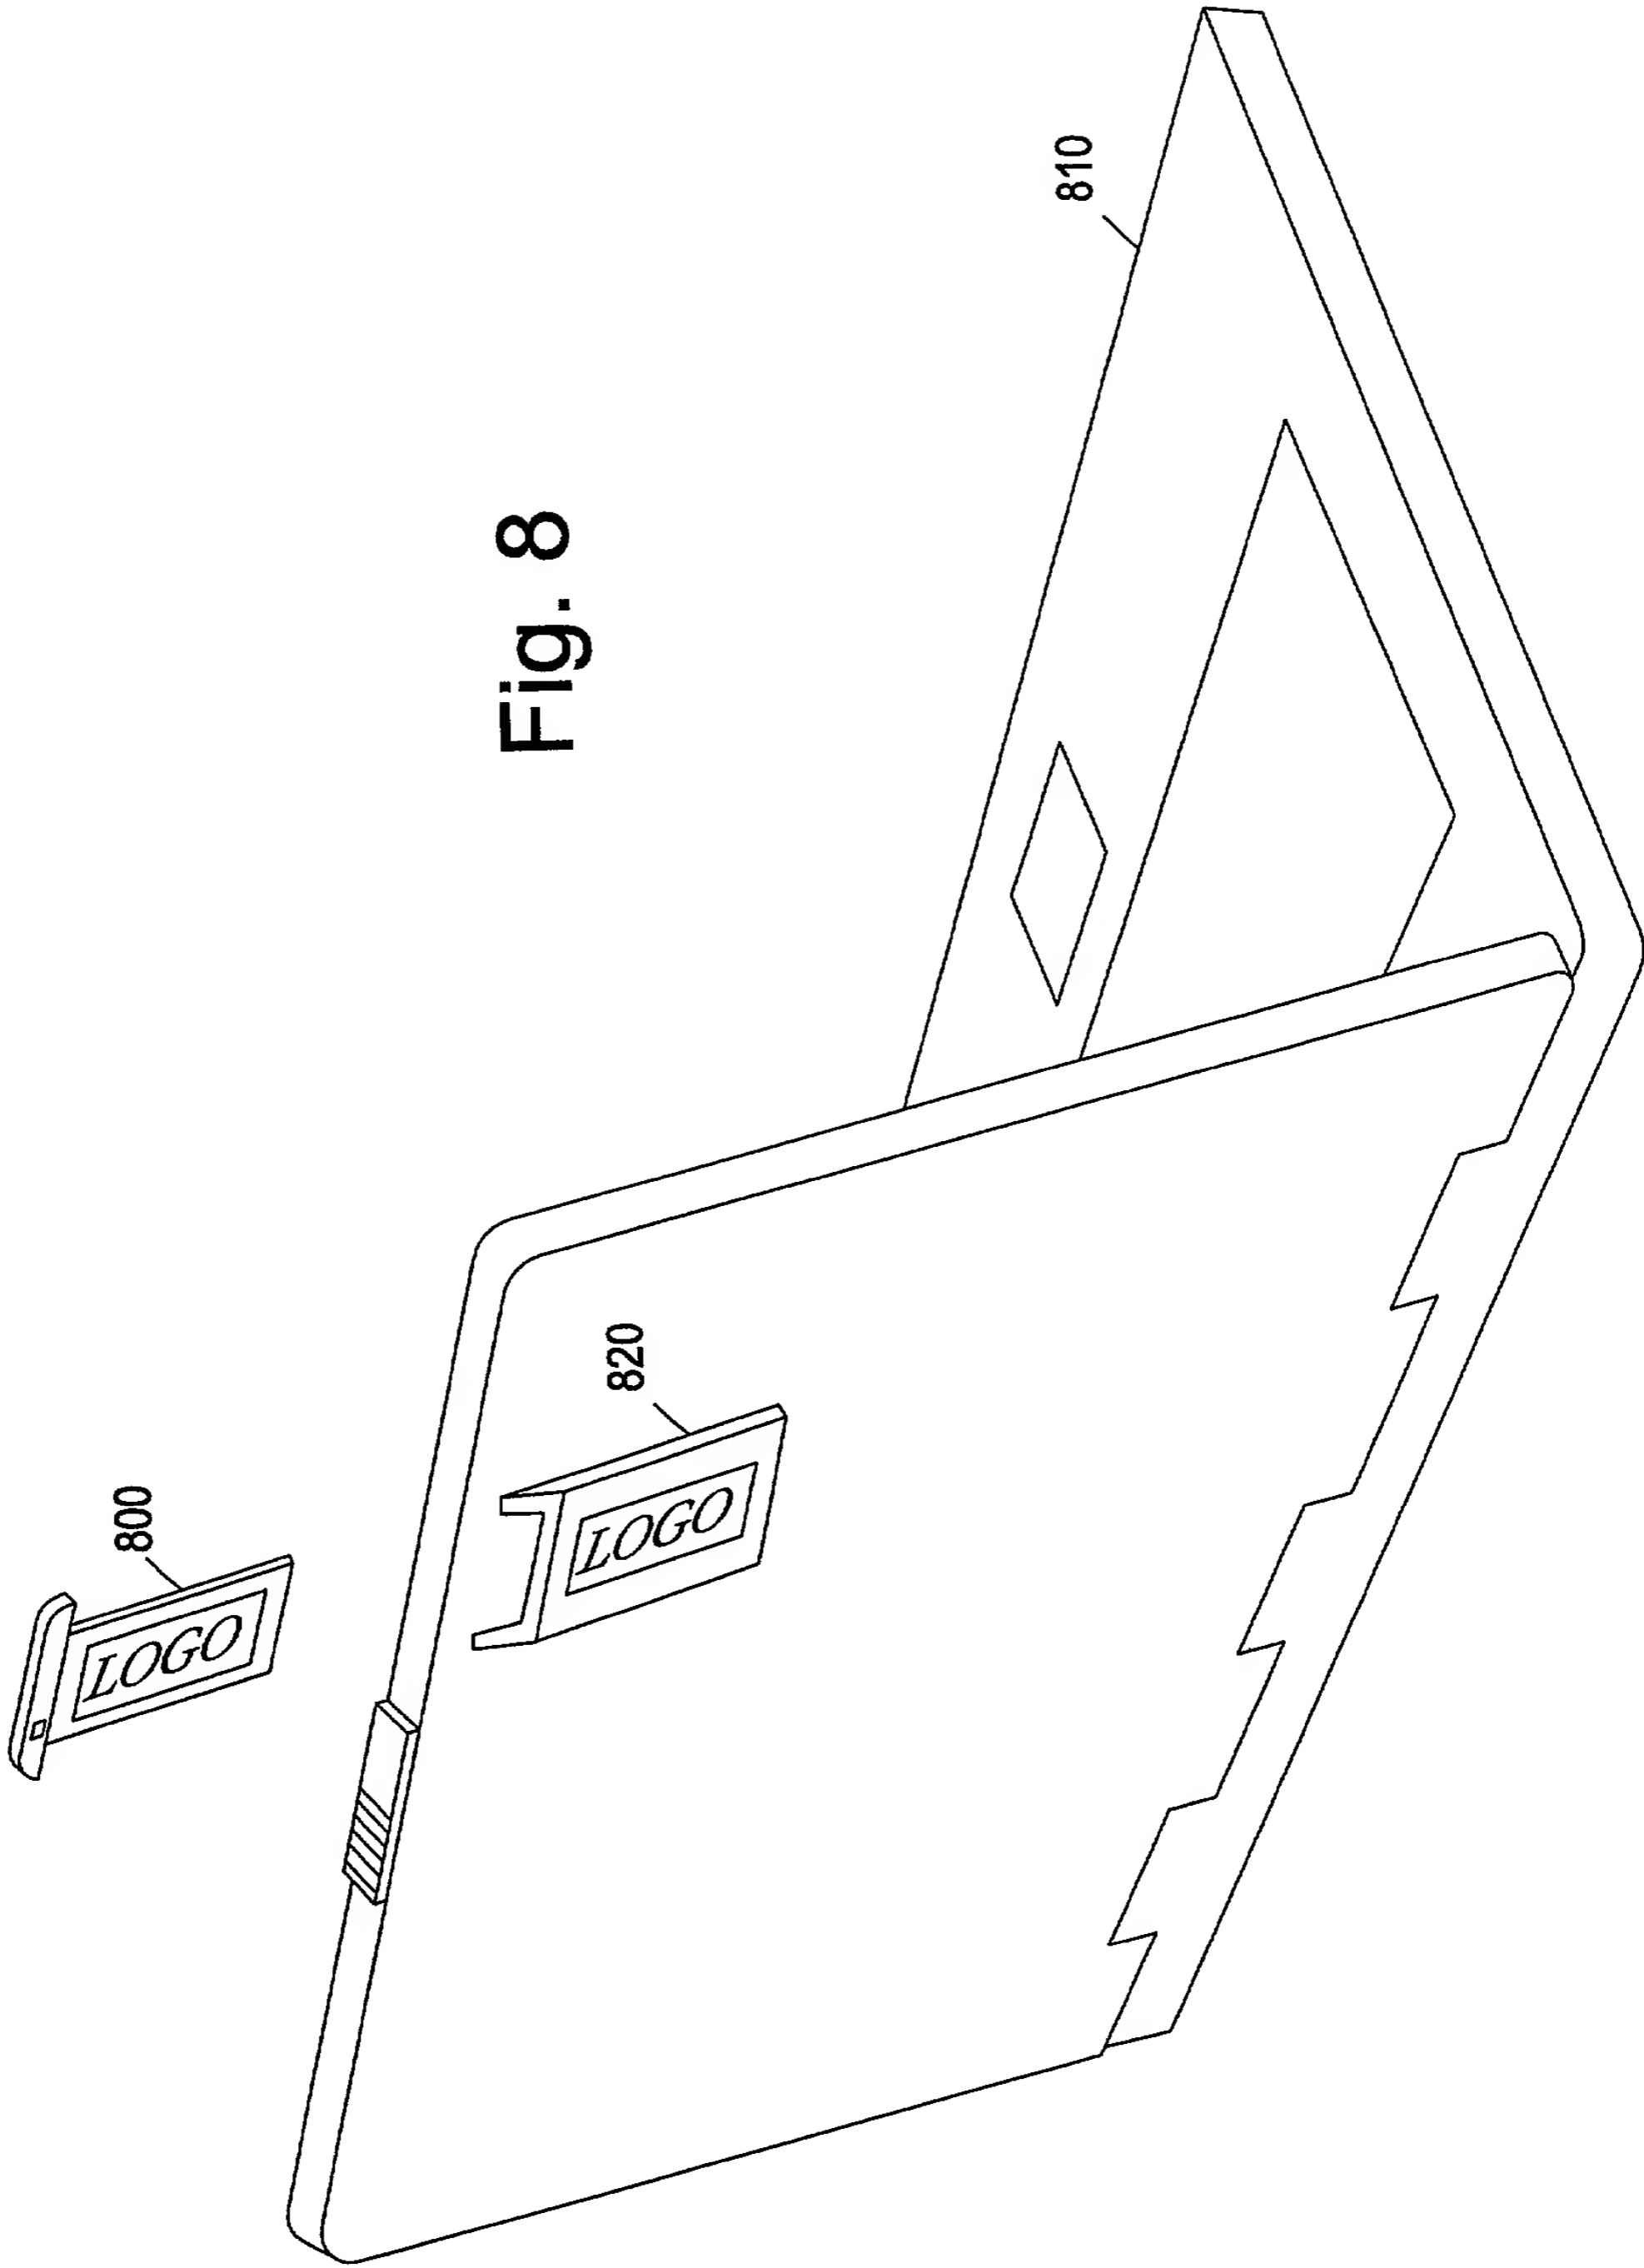


Fig. 8

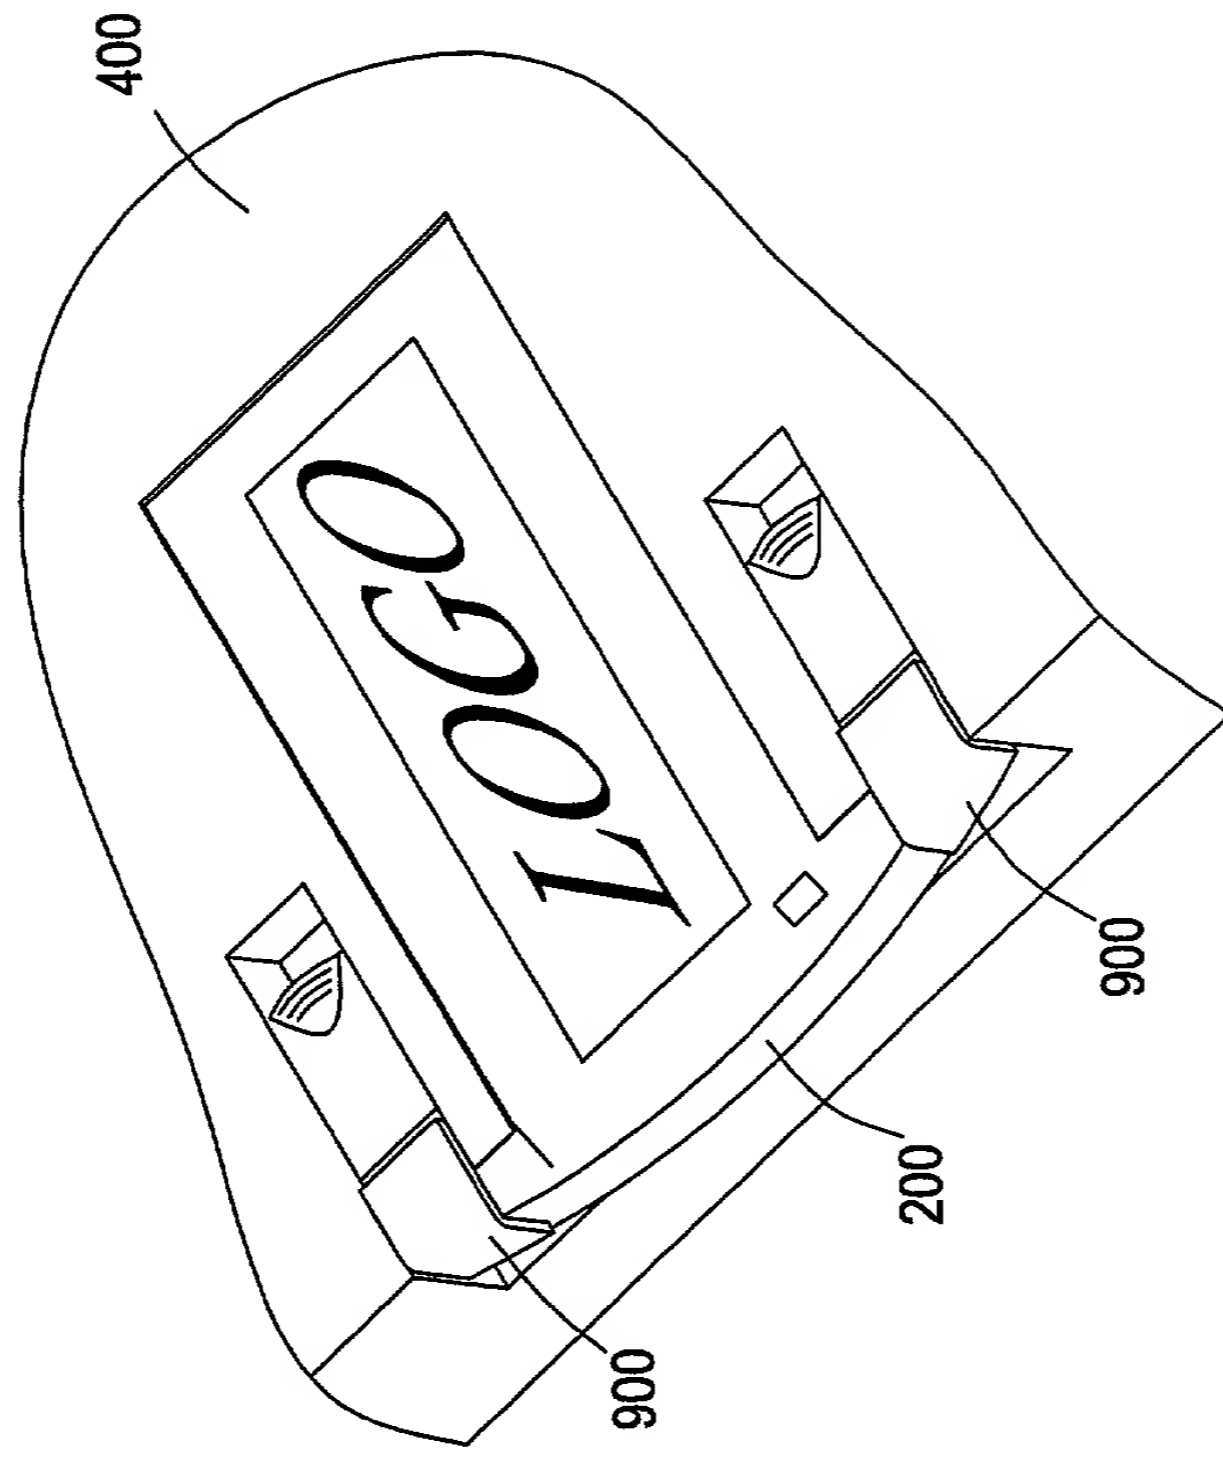
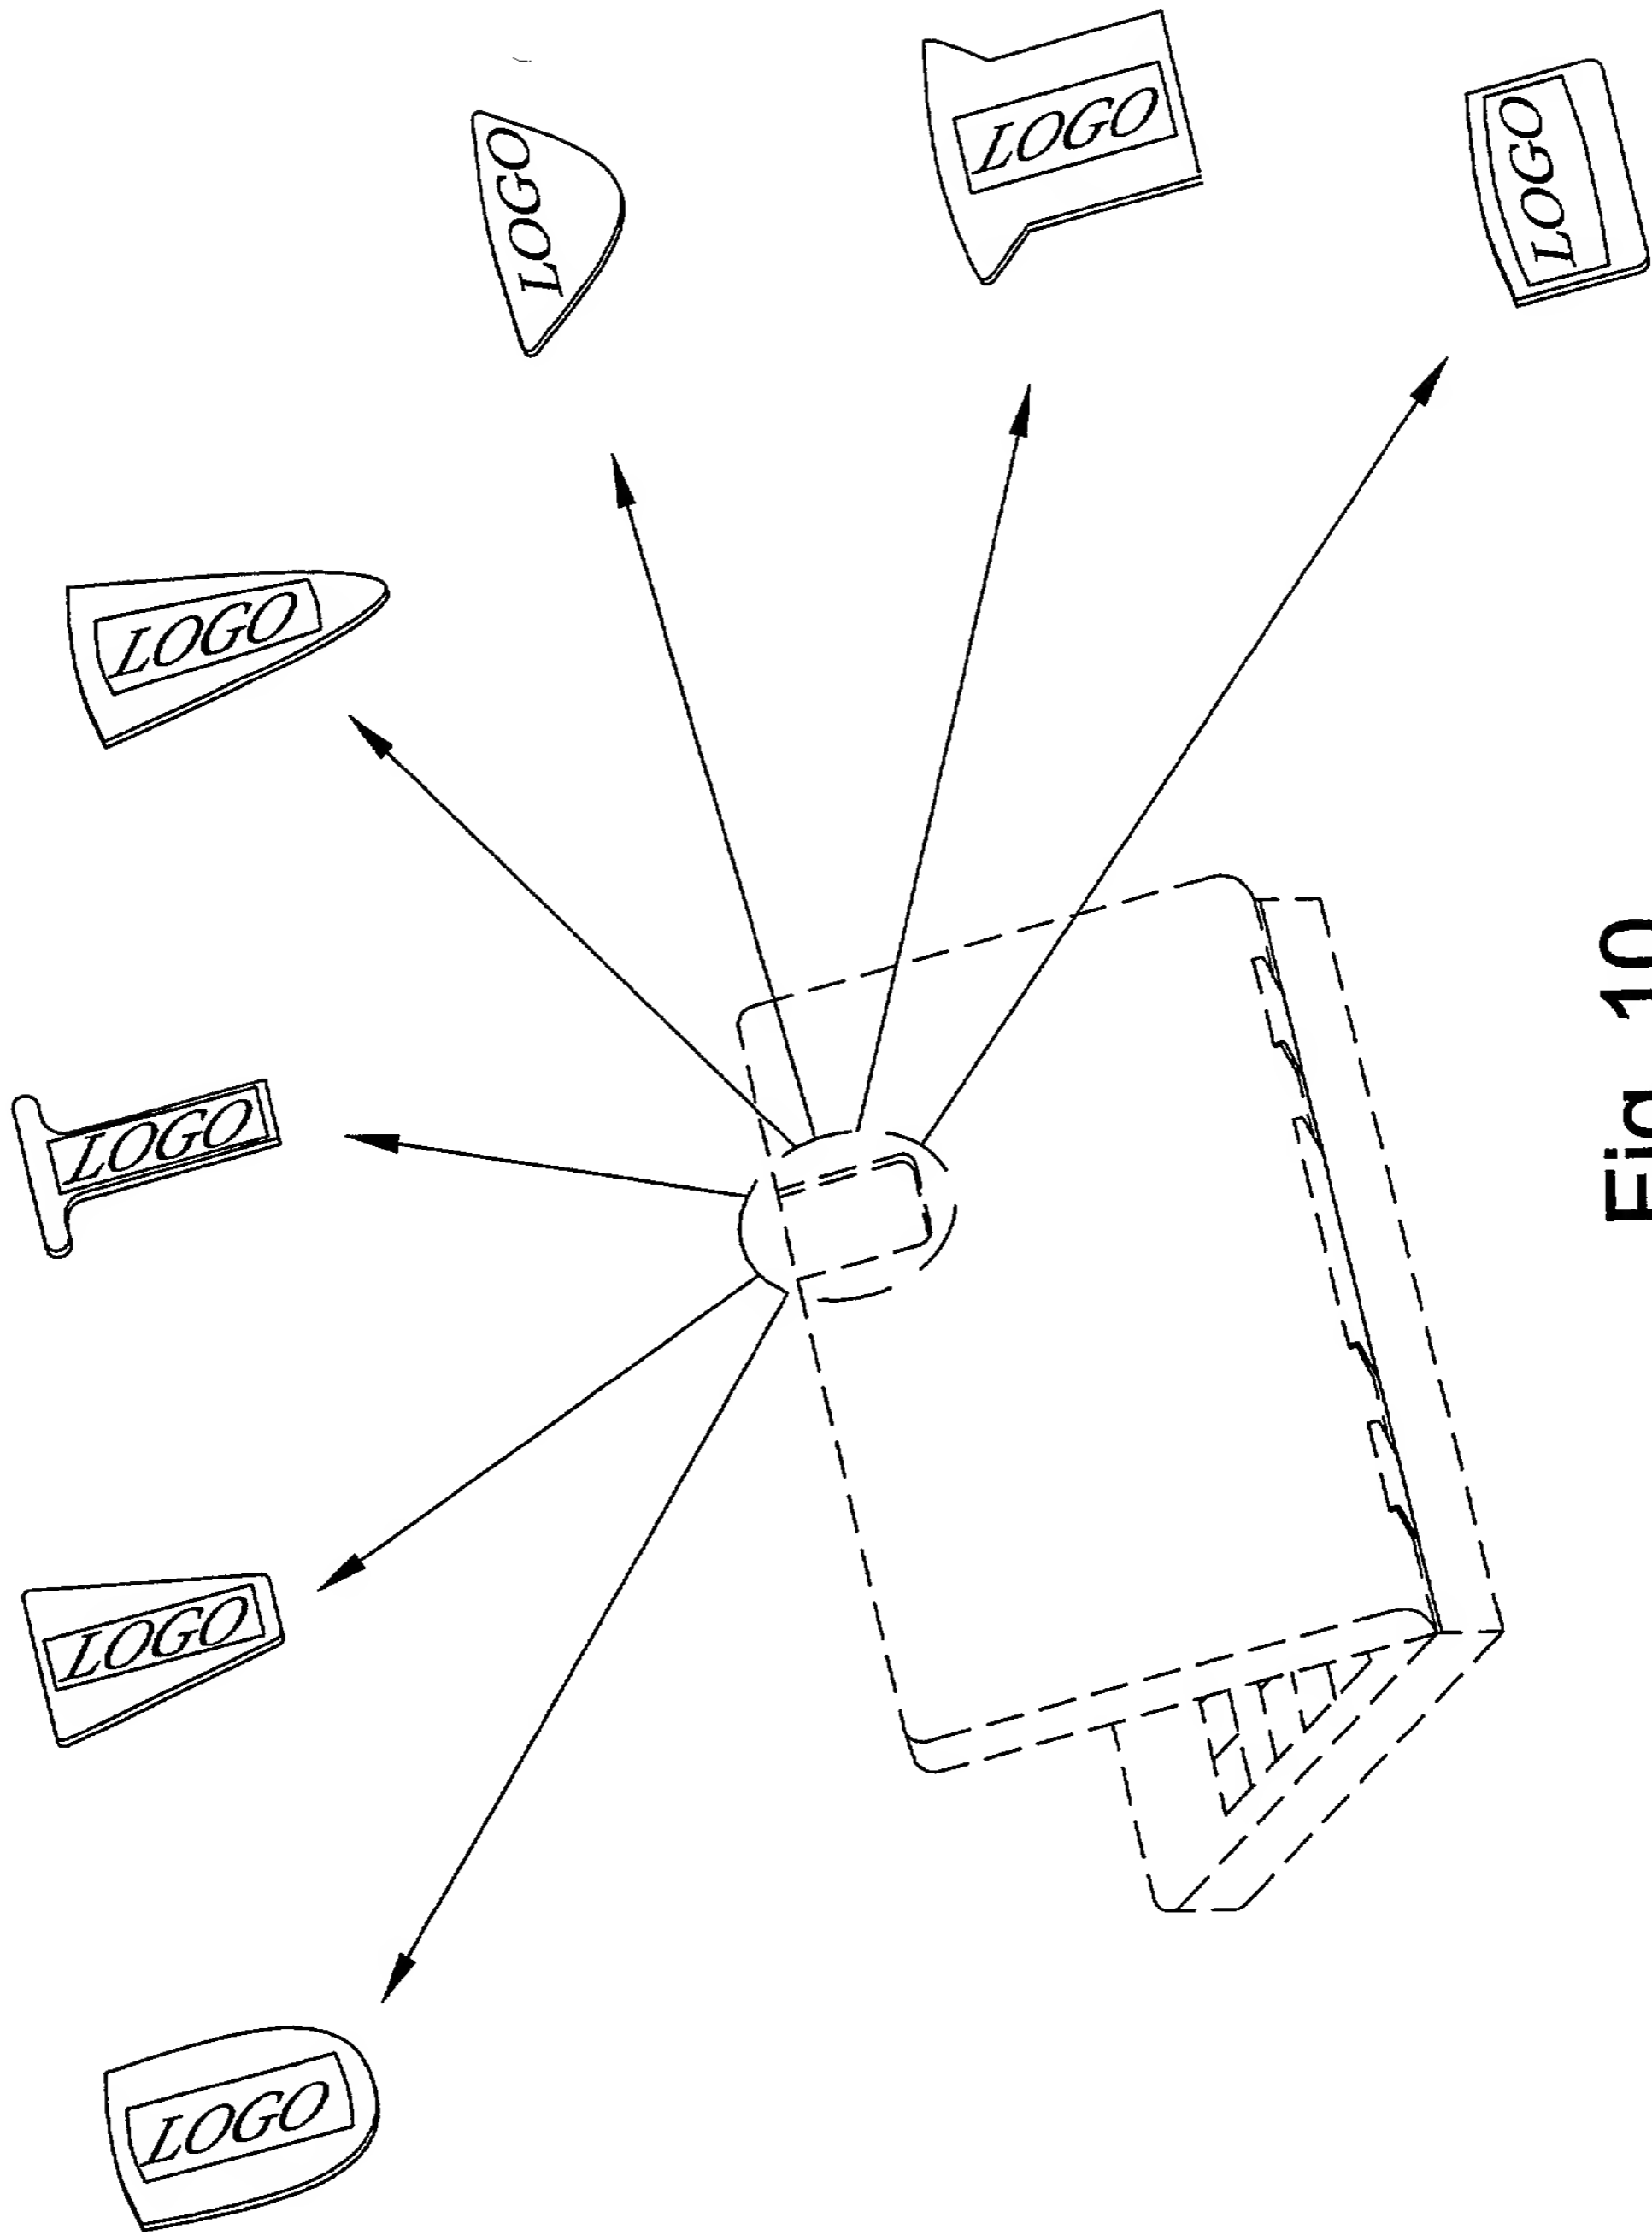


Fig. 9

[illegible]

**Fig. 10**

1215250" 57352963

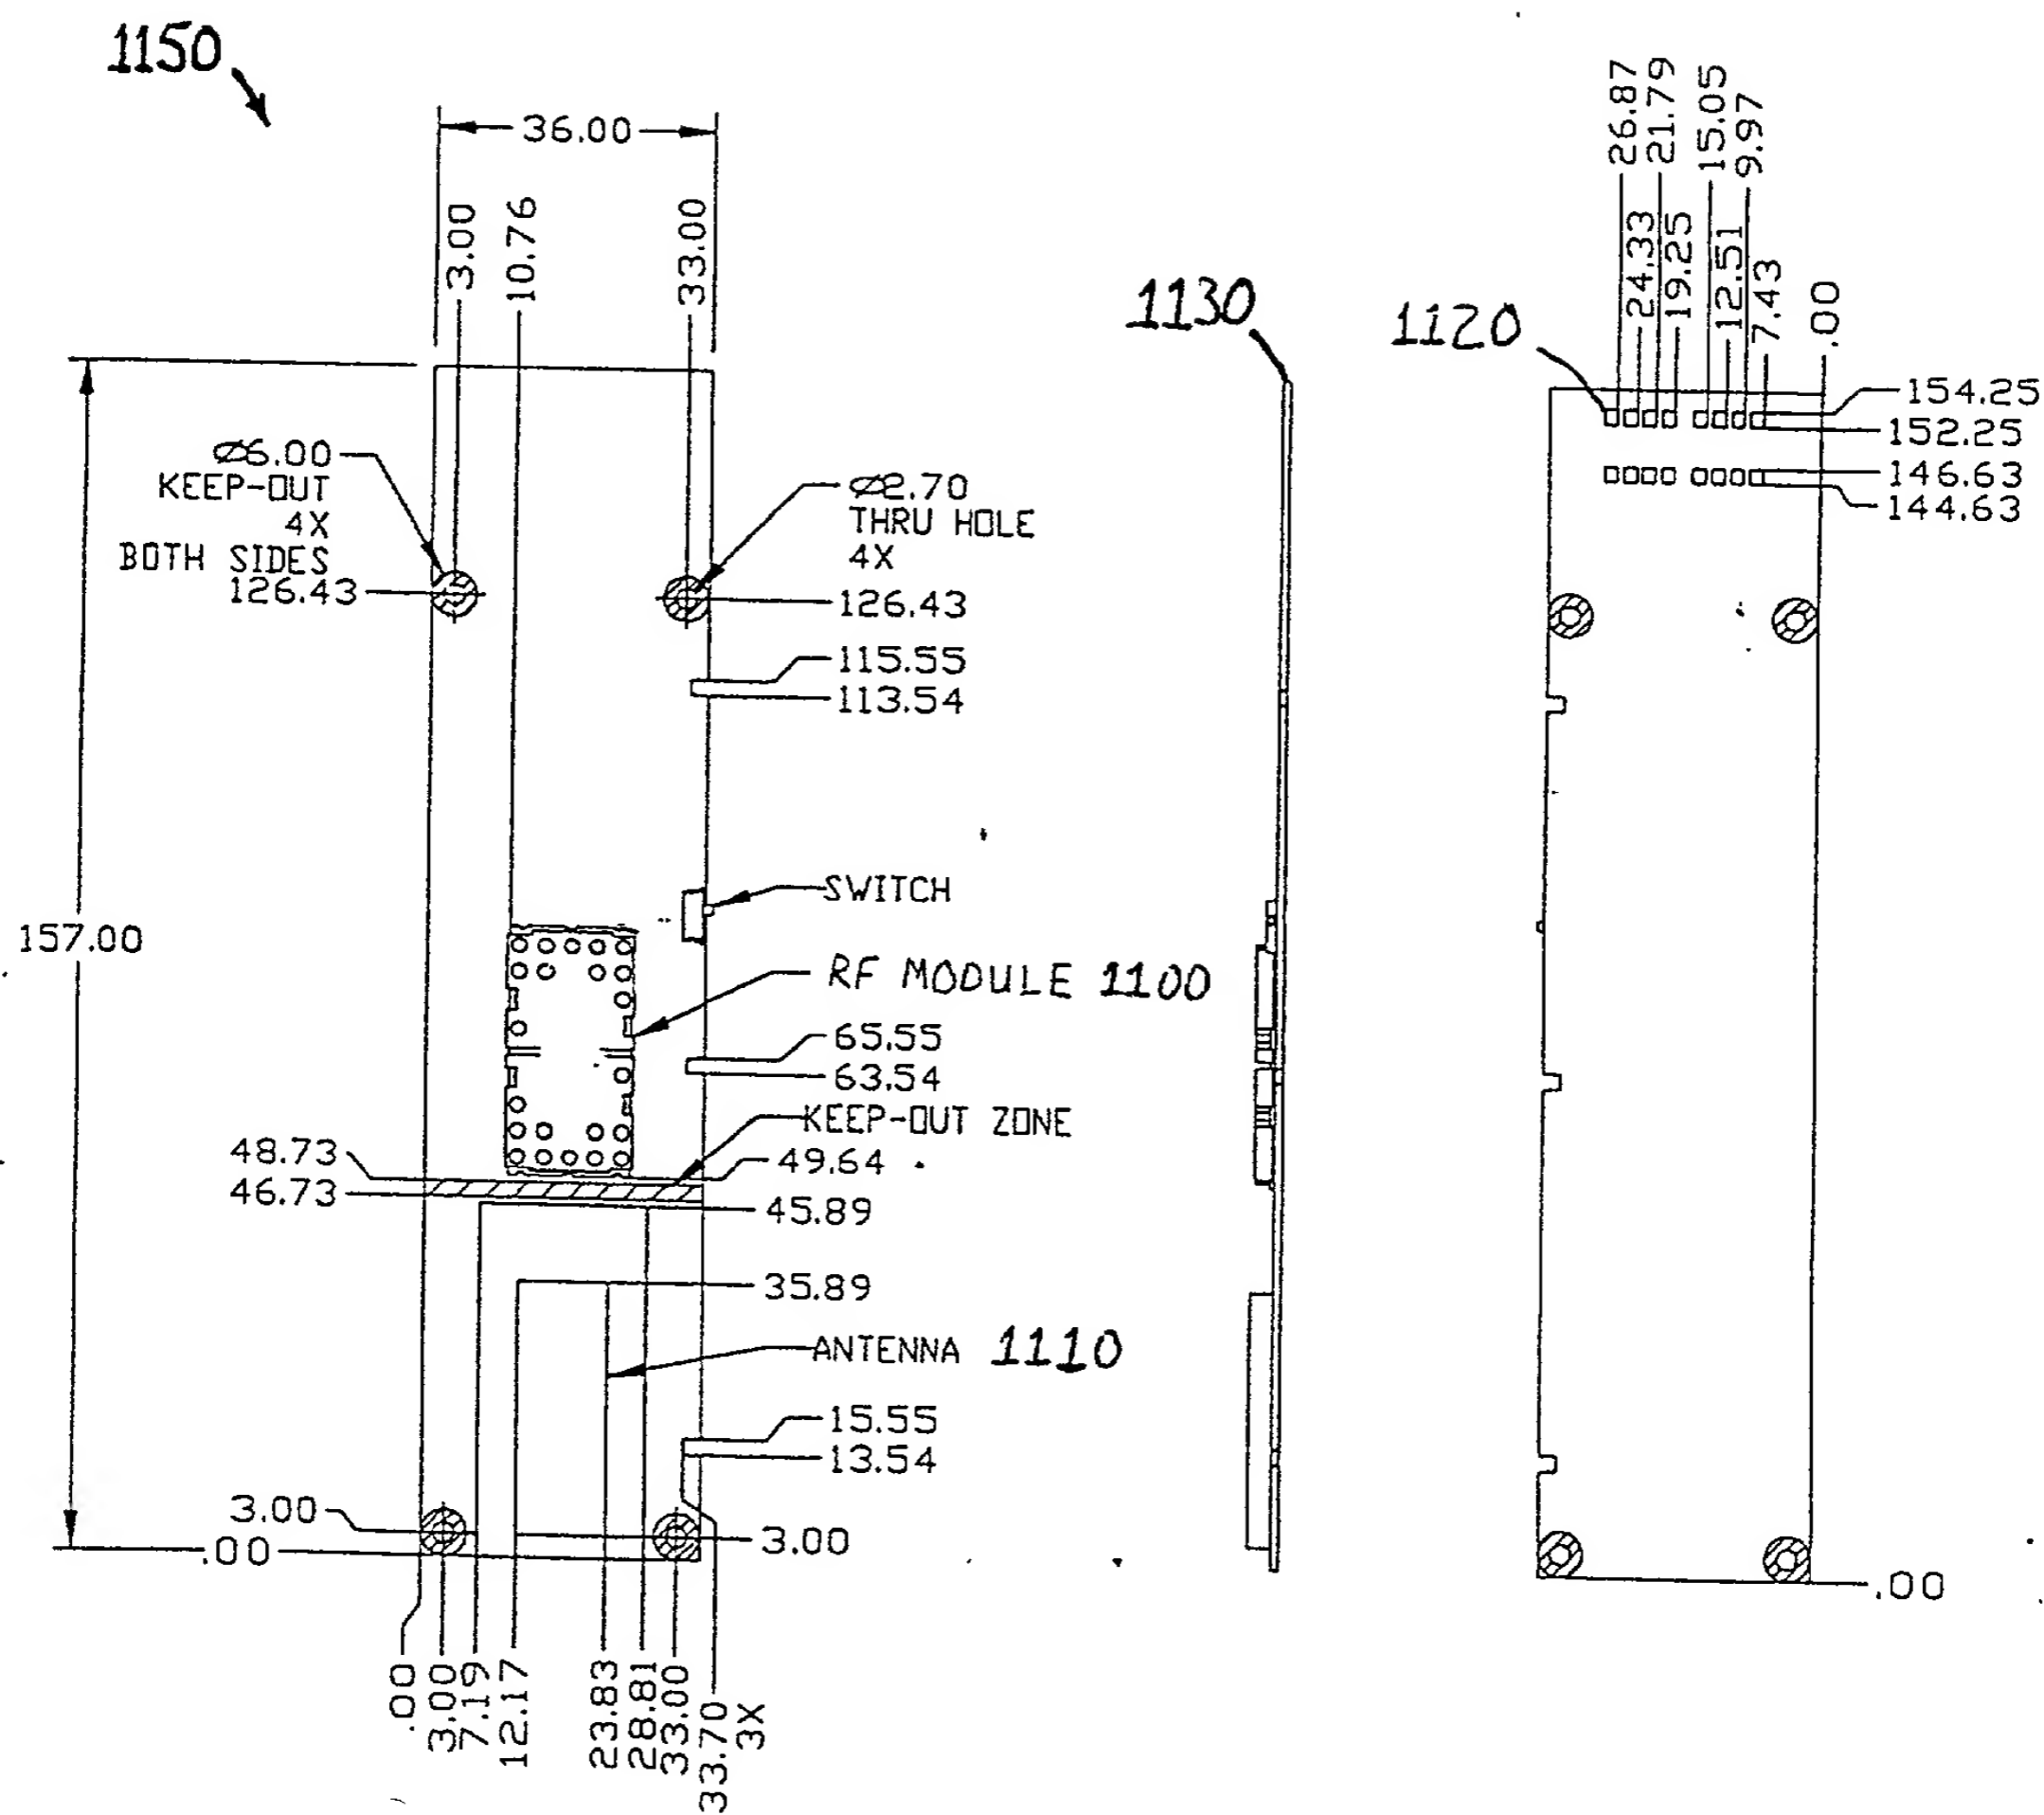


FIG. 11

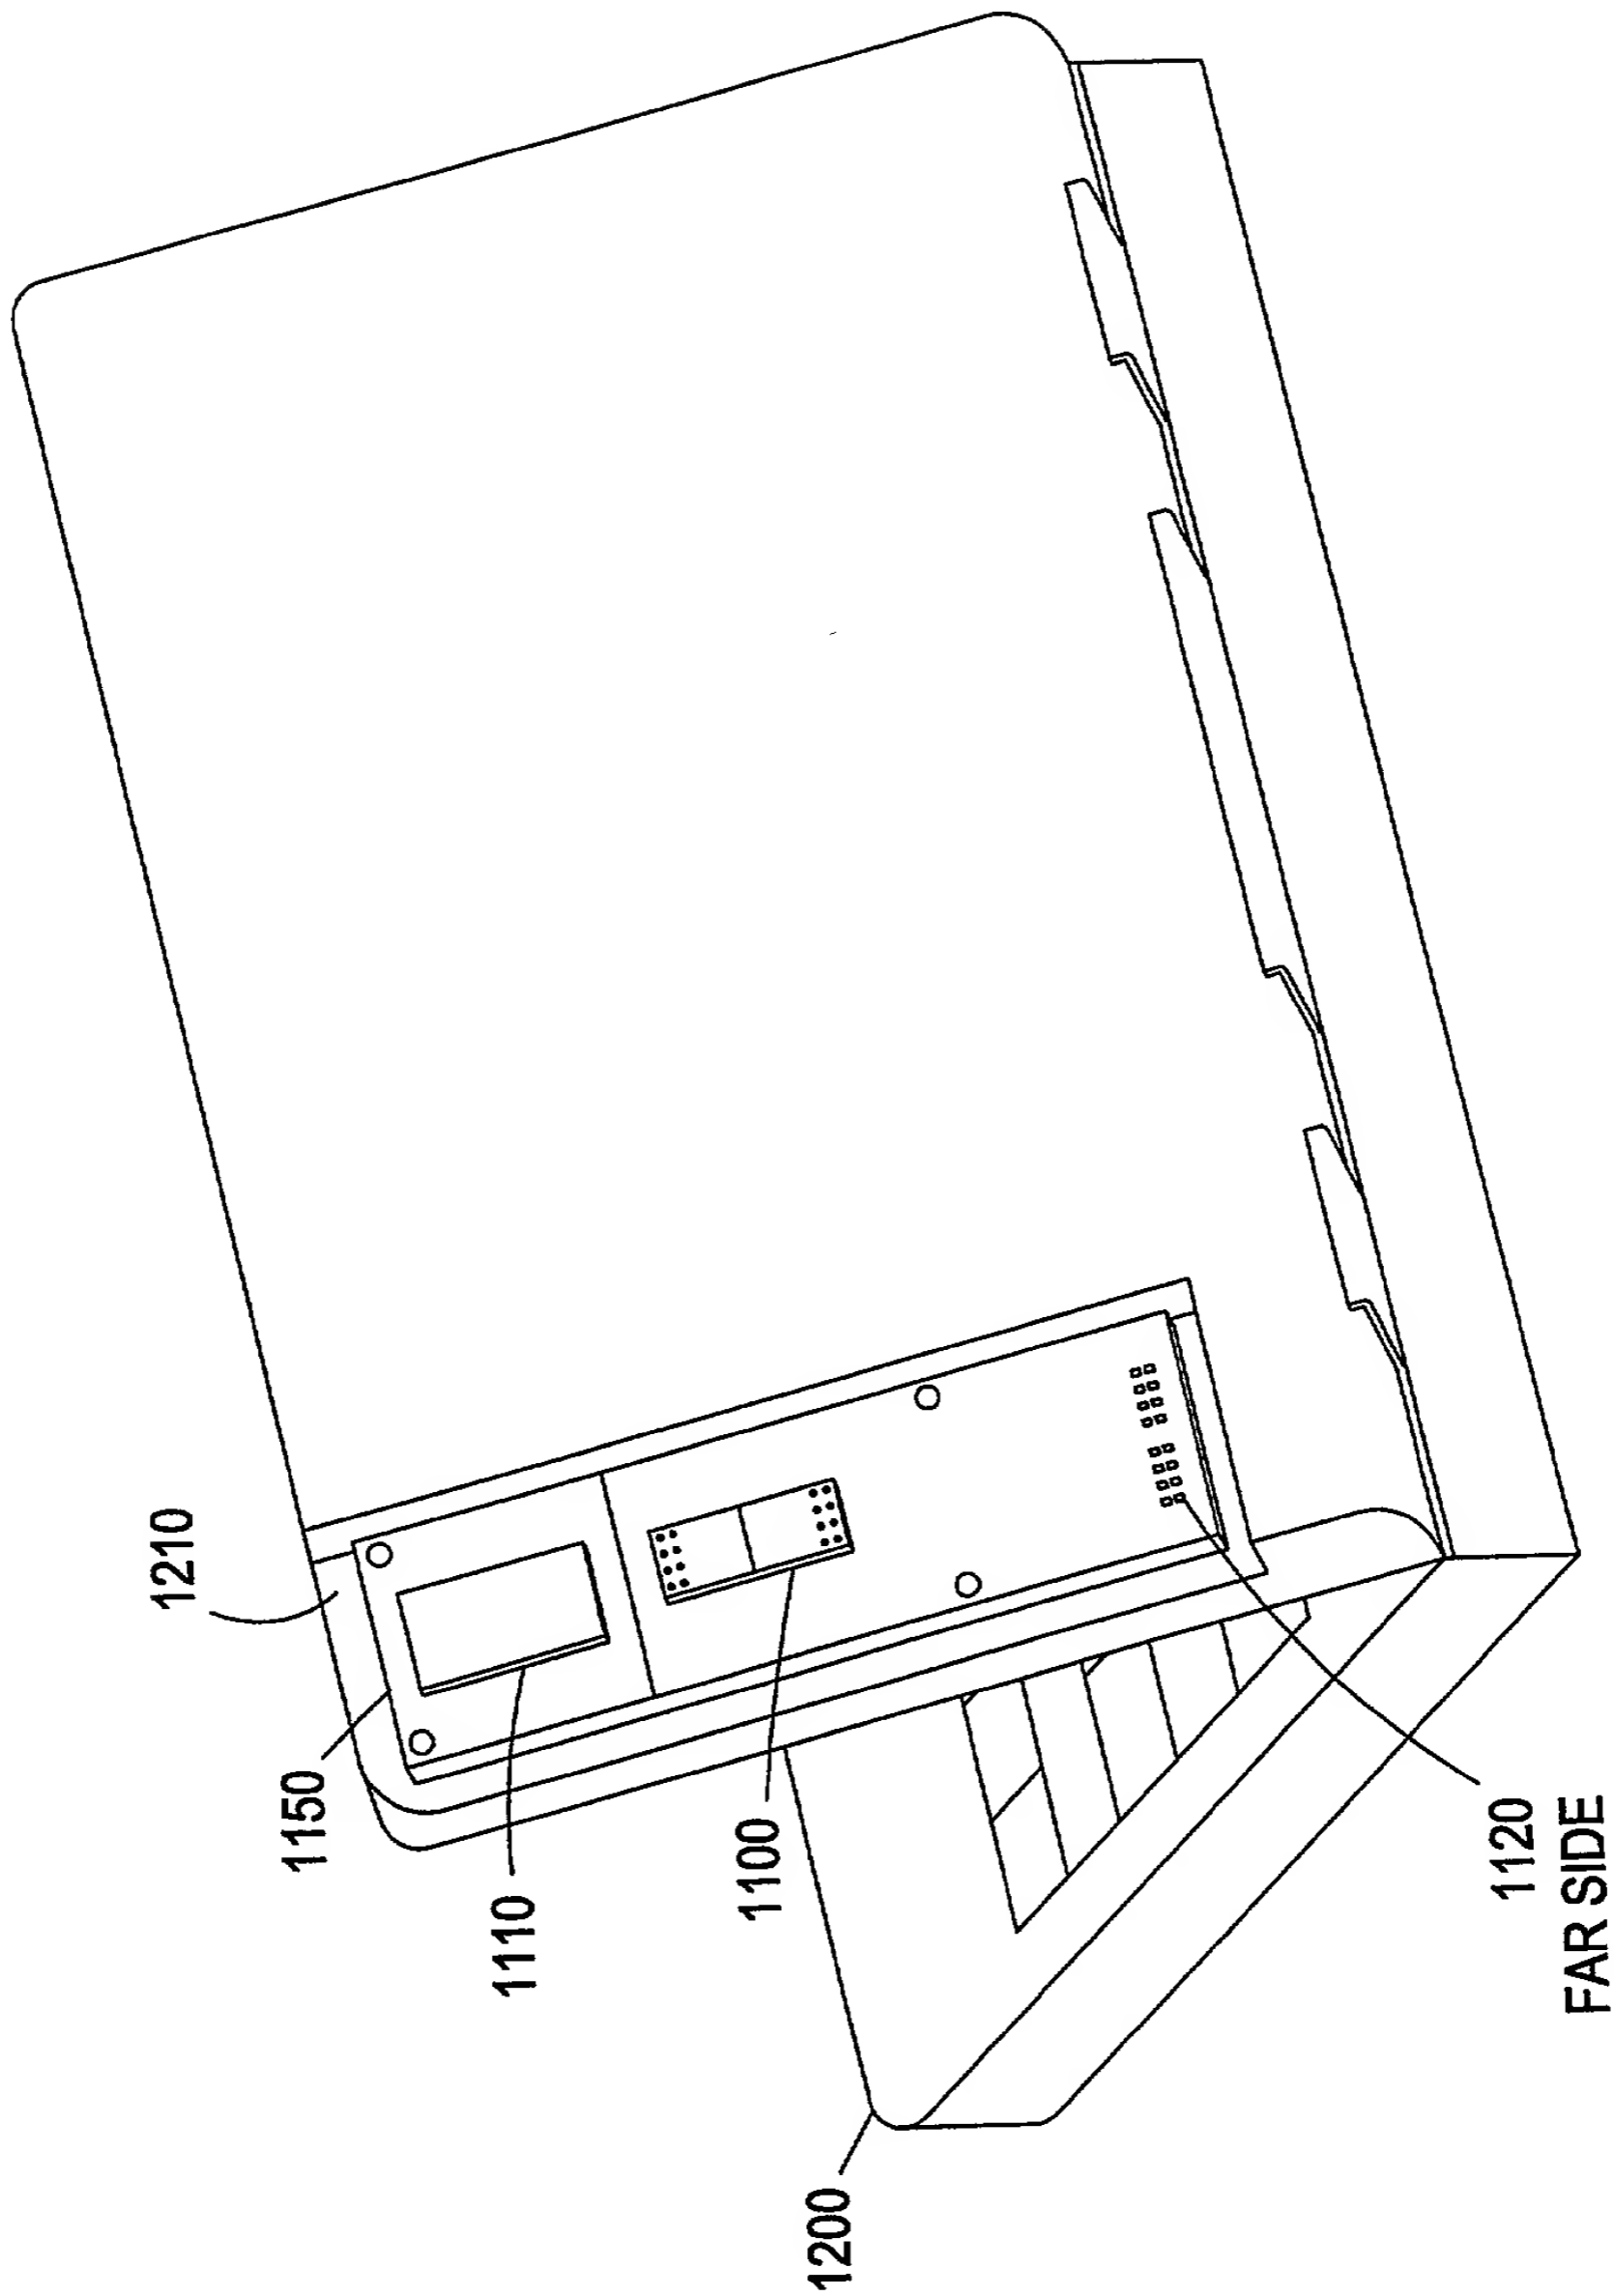


Fig. 12

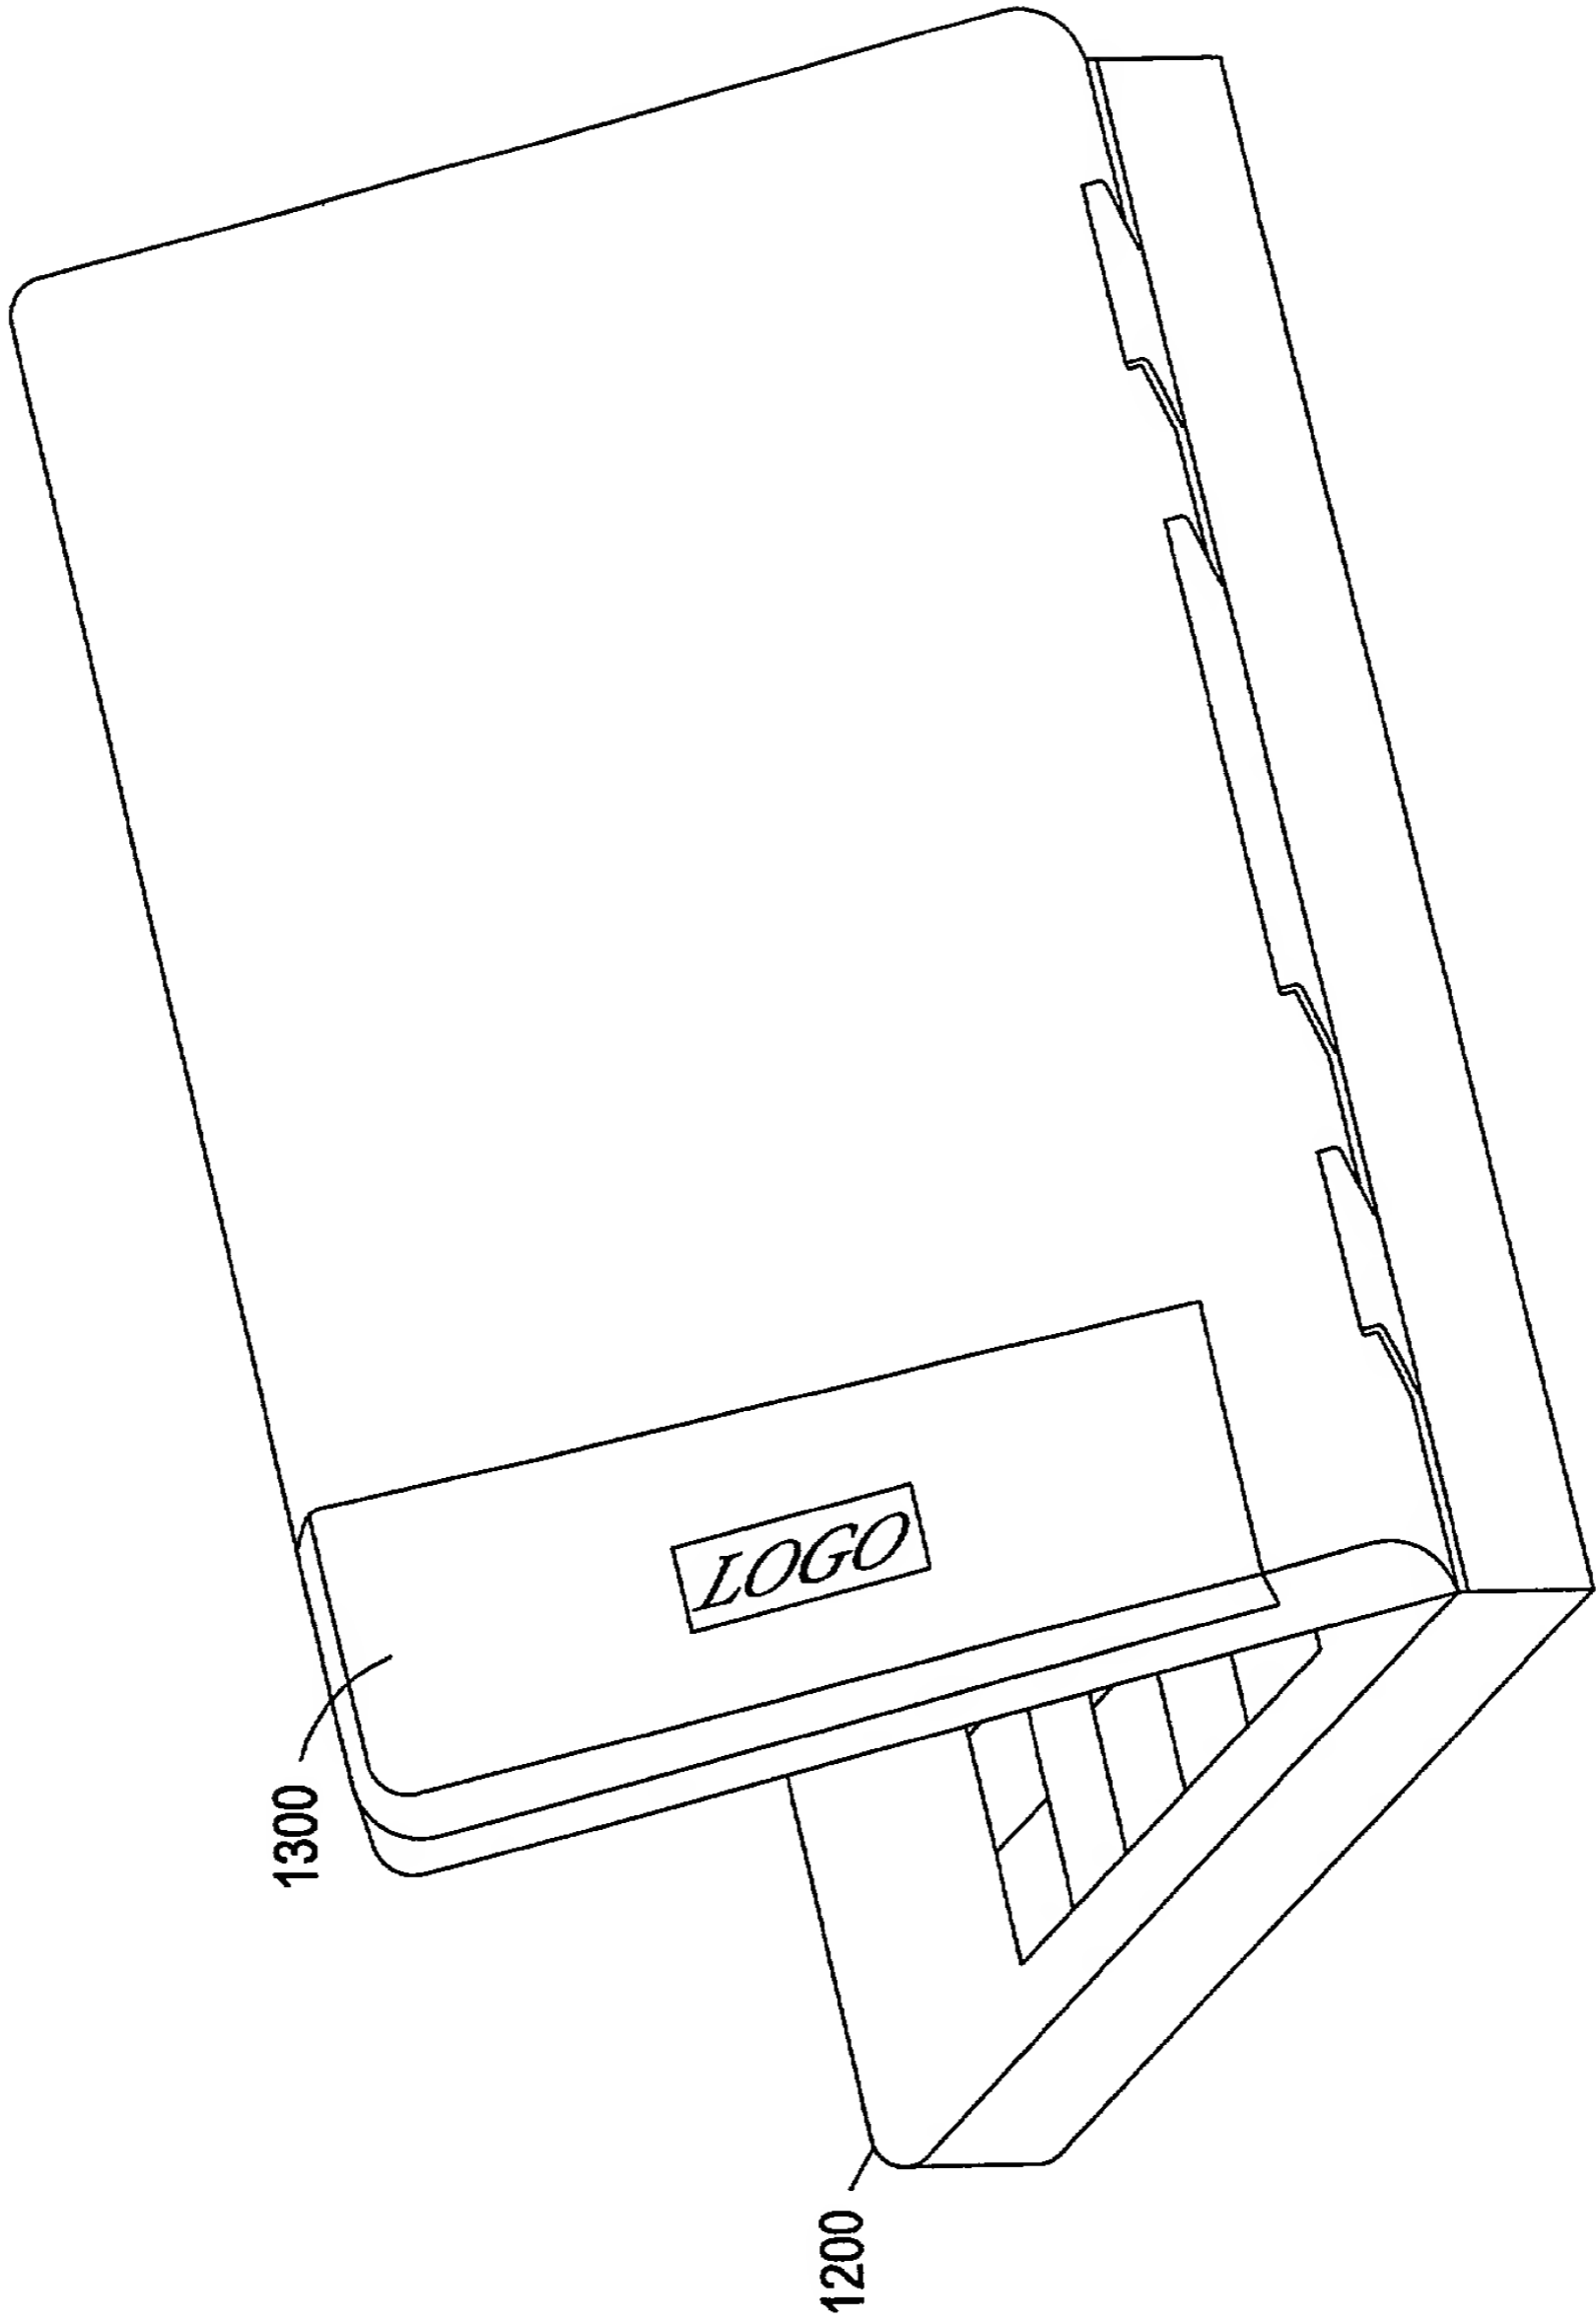


Fig. 13

Express Mail Label No. EL705960613US  
Attorney Docket No. 1662-27100  
Client Docket No. P00-2945

**DECLARATION**

**SOLE/JOINT INVENTOR  
ORIGINAL/SUBSTITUTE/CIP**

As a below named inventor, I hereby declare that: my residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **"A STANDARDIZED RF MODULE INSERT FOR A PORTABLE ELECTRONIC PROCESSING DEVICE"**, as described in the specification attached.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application; that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months prior to this application; and that I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations § 1.56(a). Such information is material when it is not cumulative to information already of record or being made of record in the application, and

- (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) it refutes, or is inconsistent with, a position the applicant has taken or may take in:

- (i) opposing an argument of unpatentability relied on by the Office, or
- (ii) asserting an argument of patentability.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificates listed below and have also identified below any foreign application(s) having a filing date before that of the application(s) on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35 United States Code § 120 of any United States application(s) listed below and, insofar as any subject matter of any claim of this application is not disclosed in the prior United States Application, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application and the national PCT international filing date of this application:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	INVENTOR'S SIGNATURE	DATE
Robin T. CASTELL	<i>Robin T. Castell</i>	9/28/2000
RESIDENCE	CITIZENSHIP	
6703 River Mill Drive, Spring, Texas, 77379	U.S.A.	
POST OFFICE ADDRESS		
SAME AS ABOVE		
FULL NAME OF SECOND JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
William Caldwell CROSSWY	<i>William Caldwell Crosswy</i>	9/27/00
RESIDENCE	CITIZENSHIP	
2 South Regent Oak, The Woodlands, Texas, 77381	U.S.A.	
POST OFFICE ADDRESS		
SAME AS ABOVE		

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicants: Robin T. CASTELL et al. §  
 Serial No.: Not Yet Assigned §  
 Filed: Concurrently Herewith §  
 For: A Standardized RF Module Insert For §  
 A Portable Electronic Processing §  
 Device §

**POWER OF ATTORNEY BY ASSIGNEE**

Under the provisions of 37 C.F.R. § 3.71, the undersigned assignee of record of the entire interest in the above-identified patent/patent application by virtue of an assignment recorded (check as applicable):

☒ Concurrently herewith  
☐ Date Recorded  
☐ Reel \_\_\_\_\_ Frame \_\_\_\_\_

elects to conduct the prosecution of the application/maintenance of the patent to the exclusion of the inventor(s). The undersigned hereby declares that she has reviewed the above-referenced assignment and hereby declares that, to the best of her knowledge, title is in the Assignee, and she is empowered to sign on behalf of the Assignee, and further declares that all statements made herein of her own knowledge are true and that all statements made on information and belief are believed to be true. The assignee hereby revokes any previous powers of attorney and appoints the following to prosecute this application/maintain this patent and transact all business in the Patent and Trademark Office connected therewith:

Kevin L. Daffer	34,146	Irene Kosturakis	33,724
Michael F. Heim	32,702	Keith Lutsch	31,851
David A. Rose	26,223	Joseph Arrambide	39,589
Marcella D. Watkins	36,962	Sarah T. Harris	35,891
Bruce Noël Kivlin	33,929	Richard P. Lange	27,296
Jonathan M. Harris	44,144	Theodore S. Park	26,971
Mark E. Scott	43,100	Lou Brucculeri	38,834
Robert C. Kowert	39,255	Jeffrey C. Hood	35,198

Please direct all communications to: Conley, Rose & Tayon, P. O. Box 3267, Houston, Texas 77253-3267, Telephone No. (713) 238-8000, to the attention of: **JONATHAN M. HARRIS.**

**ASSIGNEE**

COMPAQ COMPUTER CORPORATION

Date: 28 Sept. 2006BY: Diane H. Strong

NAME: Diane H. Strong

TITLE: Administrator, Patents

Authorized To Sign This Document On Behalf Of  
 Compaq Computer Corporation  
 Pursuant To Board Of Directors Resolution  
 Date July 28, 1989